

Ufo emergency 3h

UFO 16W IP44 4000K EMERGENCY SA

Cod: **6360646**



IP44

Protected against solid objects larger than 1 mm and splashes



I

Protection class I



CRI >80

Colour rendering index >80



CAM compliant

CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360646 | Category: Outdoor luminaires | Model: Ufo emergency 3h | Product description: UFO 16W IP44 4000K EMERGENCY SA | Source type: SMD 2835 | Number of LEDs: 88 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1530 | Beam angle: 120° | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Diameter (mm): 360 | Height (mm): 105 | Weight (g): 1300 | IP rating: IP 44 | Finishing colour: White | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -20° C | Minimal working temperature: +40° C | Nominal power (W): 18 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	120°, 120°
Number of LEDs	88	LED Lifetime	50.000 h
Color temperature (CCT)	4000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80, > 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	1530		


Mechanical data

Diameter (mm)	360	Body material	Aluminum, Aluminum
Height (mm)	105	Diffuser material	PMMA (polymethyl methacrylate)
Weight (g)	1300	Maximal working temperature	-40° C
IP rating	IP 44	Minimal working temperature	-20° C
Finishing colour	White		

Electrical data

Nominal power (W)	18	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	5
Ballast	Integrated, Integrated		
Insulation class	I, I		

Photometry

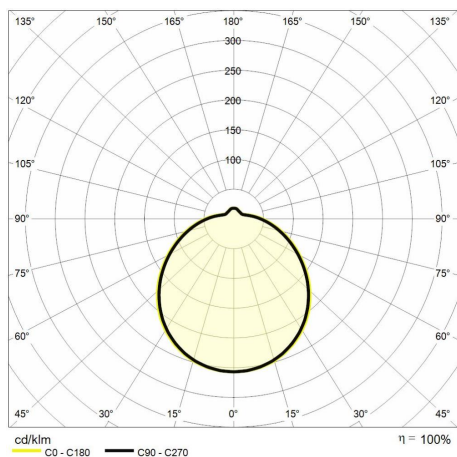

Technical drawing

