

Miniled II - 1479mm

MINILED II 21W 3000K 1479x22x30mm

Cod: **6360693**



IP20

Protected from solid bodies larger than 12 mm



II

Protection class II



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360693 | Category: Indoor luminaires | Model: Miniled II - 1479mm | Product description: MINILED II 21W 3000K 1479x22x30mm | Source type: SMD 2835 | Number of LEDs: 234 | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 2500 | Beam angle: 150° | Photobiological risk: RG0 (exempt) | LED Lifetime: 25.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 22 | Length (mm): 1479 | Height (mm): 30 | Weight (g): 630 | IP rating: IP 20 | Finishing colour: White | Body material: Aluminum | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 24 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	150°
Number of LEDs	234	Photobiological risk	RG0 (exempt)
Color temperature (CCT)	3000K	LED Lifetime	25.000 h
Color render index (CRI)	> 80, > 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E
MacAdam (SDCM)	< 6		
Lumen output (lm)	2500		


Mechanical data

Width (mm)	22	Finishing colour	White
Length (mm)	1479	Body material	Aluminum, Aluminum
Height (mm)	30	Diffuser material	PC (polycarbonate)
Weight (g)	630	Maximal working temperature	+50° C
IP rating	IP 20	Minimal working temperature	-20° C


Electrical data

Nominal power (W)	24	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	20
Ballast	Integrated, Integrated		
Insulation class	II		

Photometry

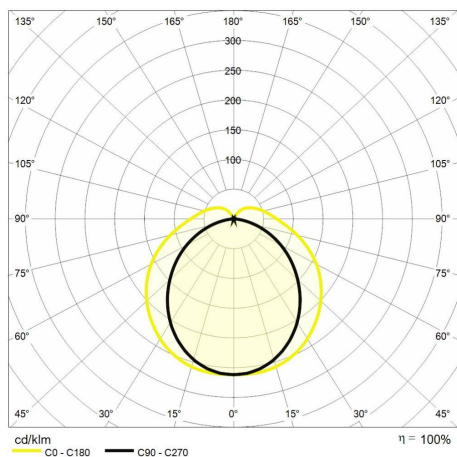

Technical drawing

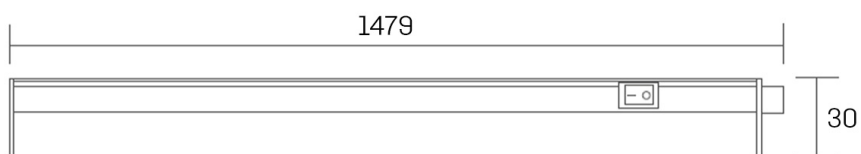

Accessories



Miniled cables

CONNECTOR for Miniled connection

Cod: 6360484