



Applique oval 230mm

APPLIQUE OVAL 15W LED IP54 4000K

Cod: **6360772**



IP54
Protected against dust and splashes



II
Protection class II



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360772 | Category: Outdoor luminaires | Model: Applique oval 230mm | Product description: APPLIQUE OVAL 15W LED IP54 4000K | Source type: SMD 2835 | Number of LEDs: 96 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1200 | Beam angle: 160° | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 104 | Length (mm): 230 | Height (mm): 42 | Weight (g): 200 | IP rating: IP 54 | Finishing colour: White | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 15 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	160°
Number of LEDs	96	LED Lifetime	50.000 h
Color temperature (CCT)	4000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80, > 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	1200		


Mechanical data

Width (mm)	104	Finishing colour	White
Length (mm)	230	Body material	PC (polycarbonate)
Height (mm)	42	Diffuser material	PC (polycarbonate)
Weight (g)	200	Maximal working temperature	+50° C
IP rating	IP 54	Minimal working temperature	-20° C

Electrical data

Nominal power (W)	15	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	20
Ballast	Integrated, Integrated		
Insulation class	II		

Photometry

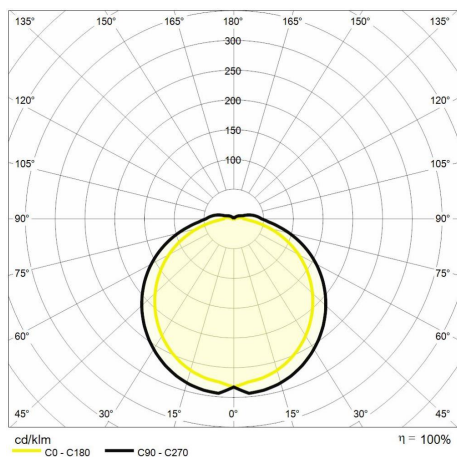

Technical drawing

