



Applique round 210mm

APPLIQUE ROUND 15W LED IP54 4000K

Cod: **6360774**



IP54
Protected against dust and
splashes



II
Protection class II



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: 6360774 | Category: Outdoor luminaires | Model: Applique round 210mm | Product description: APPLIQUE ROUND 15W LED IP54 4000K | Source type: SMD 2835 | Number of LEDs: 72 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1200 | Beam angle: 160° | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Diameter (mm): 210 | Height (mm): 49 | Weight (g): 300 | IP rating: IP 54 | Finishing colour: White | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 15 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	160°
Number of LEDs	72	LED Lifetime	50.000 h
Color temperature (CCT)	4000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80, > 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	1200		


Mechanical data

Diameter (mm)	210	Body material	PC (polycarbonate)
Height (mm)	49	Diffuser material	PC (polycarbonate)
Weight (g)	300	Maximal working temperature	+50° C
IP rating	IP 54	Minimal working temperature	-20° C
Finishing colour	White		

Electrical data

Nominal power (W)	15	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	20
Ballast	Integrated, Integrated		
Insulation class	II		

Photometry

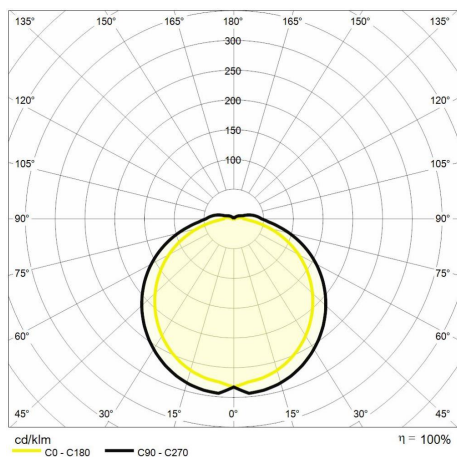

Technical drawing

