



Applique round 280mm

APPLIQUE ROUND 24W LED IP44
3000K

Cod: **6360779**



IP44

Protected against solid objects larger than 1 mm and splashes



II

Protection class II



CRI >80

Colour rendering index >80



Reer warranty

Reer guarantees the product for a time duration of 3 years



Technical description

Product code: 6360779 | Category: Outdoor luminaires | Model: Applique round 280mm | Product description: APPLIQUE ROUND 24W LED IP44 3000K | Source type: SMD 2835 | Number of LEDs: 144 | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1750 | Beam angle: 110° | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Diameter (mm): 280 | Height (mm): 62 | Weight (g): 700 | IP rating: IP 44 | Finishing colour: White | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 24 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	110°
Number of LEDs	144	LED Lifetime	50.000 h
Color temperature (CCT)	3000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80, > 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	1750		


Mechanical data

Diameter (mm)	280	Body material	PC (polycarbonate)
Height (mm)	62	Diffuser material	PC (polycarbonate)
Weight (g)	700	Maximal working temperature	+50° C
IP rating	IP 44	Minimal working temperature	-20° C
Finishing colour	White		

Electrical data

Nominal power (W)	24	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	10
Ballast	Integrated, Integrated		
Insulation class	II		

Photometry

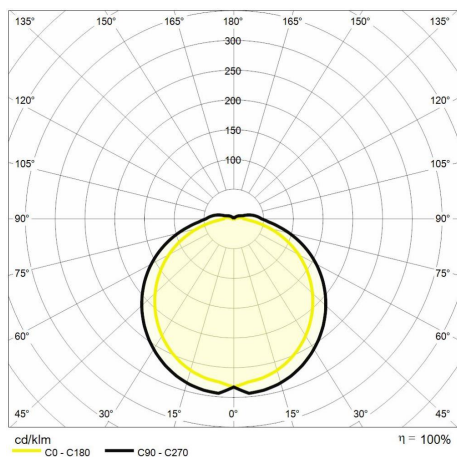

Technical drawing

