



Applique square 270mm

APPLIQUE SQUARE 24W LED IP44
3000K

Cod: **6360781**



IP44

Protected against solid objects larger than 1 mm and splashes



II

Protection class II



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360781 | Category: Outdoor luminaires | Model: Applique square 270mm | Product description: APPLIQUE SQUARE 24W LED IP44 3000K | Source type: SMD 2835 | Number of LEDs: 144 | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1750 | Beam angle: 110° | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 270 | Length (mm): 270 | Height (mm): 62 | Weight (g): 800 | IP rating: IP 44 | Finishing colour: White | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 24 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	110°
Number of LEDs	144	LED Lifetime	50.000 h
Color temperature (CCT)	3000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	1950		


Mechanical data

Width (mm)	270	Finishing colour	White
Length (mm)	270	Body material	PC (polycarbonate)
Height (mm)	62	Diffuser material	PC (polycarbonate)
Weight (g)	800	Maximal working temperature	+50° C
IP rating	IP 44	Minimal working temperature	-20° C

Electrical data

Nominal power (W)	24	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	10
Ballast	Integrated, Integrated		
Insulation class	II		

Photometry

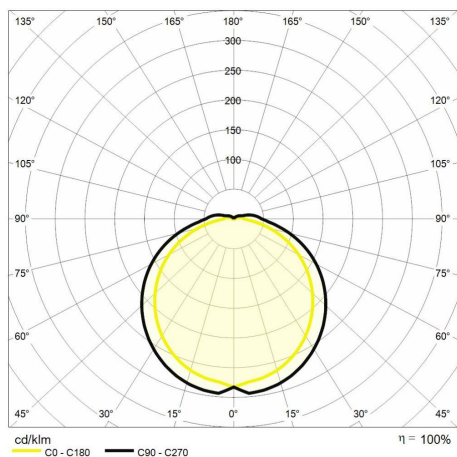

Technical drawing

