



Specchio 900mm

SPECCHIO 20W 230V IP44 4000K
900mm silver

Cod: **6360983**



IP44

Protected against solid objects larger than 1 mm and splashes



II

Protection class II



CRI >80

Colour rendering index >80



CAM compliant

CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360983 | Category: Indoor luminaires | Model: Specchio 900mm | Product description: SPECCHIO 20W 230V IP44 4000K 900mm silver | Source type: SMD | Number of LEDs: 42 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1600 | Beam angle: 133° | Photobiological risk: RG0 (exempt) | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 53 | Length (mm): 900 | Height (mm): 65 | Weight (g): 850 | IP rating: IP 44 | Finishing colour: Silver | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +45° C | Nominal power (W): 20 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD, SMD	Beam angle	133°
Number of LEDs	42	Photobiological risk	RG0 (exempt)
Color temperature (CCT)	4000K	LED Lifetime	50.000 h
Color render index (CRI)	> 80, > 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
MacAdam (SDCM)	< 6		
Lumen output (lm)	1600		


Mechanical data

Width (mm)	53	Type of finishing	Polyester powder coated, Polyester powder coated
Length (mm)	900	Body material	Aluminum, Aluminum
Height (mm)	65	Diffuser material	PC (polycarbonate)
Weight (g)	850	Maximal working temperature	+45° C
IP rating	IP 44	Minimal working temperature	-20° C
Finishing colour	Silver		

Electrical data

Nominal power (W)	20	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	10
Ballast	Integrated, Integrated		
Insulation class	II		

Photometry

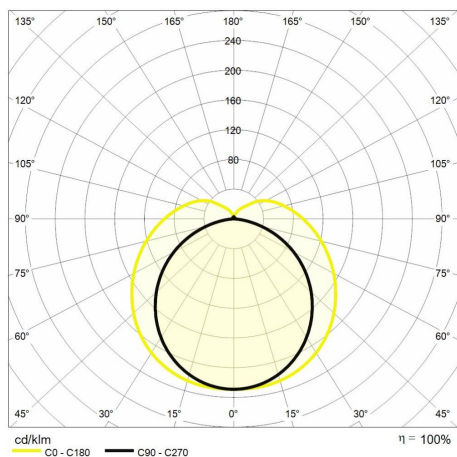

Technical drawing

