



Domino E 200W

DOMINO E/2,0 200W 230V IP65 4000K

Cod: **6361105**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



CAM compliant

CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361105 | Category: Outdoor luminaires | Model: Domino E 200W | Product description: DOMINO E/2,0 200W 230V IP65 4000K | Source type: SMD | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 24000 | Beam angle: 110° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 390 | Length (mm): 300 | Height (mm): 49 | Weight (g): 4000 | IP rating: IP 65 | IK rating: IK 08 | Finishing colour: Black | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -30° C | Minimal working temperature: +50° C | Nominal power (W): 200 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD	Photobiological risk	RG1 (low risk), RG1 (low risk)
Color temperature (CCT)	4000K	LED Lifetime	50.000 h
Color render index (CRI)	> 80, > 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
MacAdam (SDCM)	< 6		
Lumen output (lm)	24000		
Beam angle	110°		


Mechanical data

Width (mm)	390	Finishing colour	Black
Length (mm)	300	Type of finishing	Polyester powder coated, Polyester powder coated
Height (mm)	49	Body material	Aluminum, Aluminum
Weight (g)	4000	Diffuser material	Tempered glass
IP rating	IP 65	Maximal working temperature	+50° C
IK rating	IK 08	Minimal working temperature	-30° C

Electrical data

Nominal power (W)	200	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	1
Ballast	Integrated, Integrated		
Insulation class	I, I		

Photometry

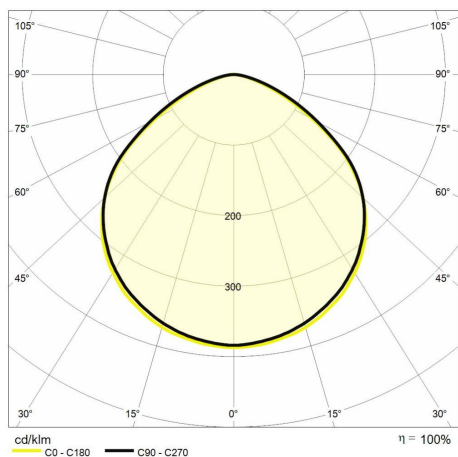

Technical drawing

