

Tablet V 20W

TABLET V 20W 230V IP65 4000K White
Erp

Cod: **6361129**



IP65
Dustproof and protected against
water jets



I
Protection class I



CRI >80
Colour rendering index >80



Reer warranty
Reer guarantees the product for a
time duration of 3 years



Technical description

Product code: 6361129 | Category: Outdoor luminaires | Model: Tablet V 20W | Product description: TABLET V 20W 230V IP65 4000K White Erp | Source type: SMD | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1800 | Beam angle: 110° | Photobiological risk: RG1 (low risk) | LED Lifetime: 20.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 108 | Length (mm): 96 | Height (mm): 6 | Weight (g): 400 | IP rating: IP 65 | Finishing colour: White | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -15° C | Minimal working temperature: +45° C | Nominal power (W): 20 | Power factor: > 0,7 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD	Photobiological risk	RG1 (low risk), RG1 (low risk)
Color temperature (CCT)	4000K	LED Lifetime	20.000 h
Color render index (CRI)	> 80, > 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
MacAdam (SDCM)	< 6		
Lumen output (lm)	1800		
Beam angle	110°		


Mechanical data

Width (mm)	108	Type of finishing	Polyester powder coated, Polyester powder coated
Length (mm)	96	Body material	Aluminum, Aluminum
Height (mm)	6	Diffuser material	Tempered glass
Weight (g)	400	Maximal working temperature	+45° C
IP rating	IP 65	Minimal working temperature	-15° C
Finishing colour	White		

Electrical data

Nominal power (W)	20	Dimmable	No
Power factor	0,7	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	60
Ballast	Integrated, Integrated		
Insulation class	I, I		

Photometry

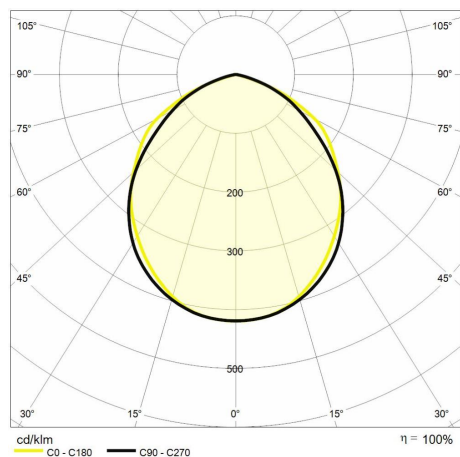

Technical drawing

