

Tablet V 30W

TABLET V 30W 230V IP44 4000K Black with Sensor

Cod: **6361133**



IP65
Dustproof and protected against water jets



I
Protection class I



CRI >80
Colour rendering index >80



Sensor
Equipped with light and motion sensor



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361133 | Category: Outdoor luminaires | Model: Tablet V 30W | Product description: TABLET V 30W 230V IP44 4000K Black with Sensor | Source type: SMD | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 2700 | Beam angle: 110° | Photobiological risk: RG1 (low risk) | LED Lifetime: 25.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 186 | Length (mm): 135 | Height (mm): 30 | Weight (g): 320 | IP rating: IP 65 | Finishing colour: Black | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -15° C | Minimal working temperature: +45° C | Nominal power (W): 30 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD	Photobiological risk	RG1 (low risk), RG1 (low risk)
Color temperature (CCT)	3000K	LED Lifetime	25.000 h
Color render index (CRI)	> 80, > 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
MacAdam (SDCM)	< 6		
Lumen output (lm)	2700		
Beam angle	110°		


Mechanical data

Width (mm)	186	Type of finishing	Polyester powder coated, Polyester powder coated
Length (mm)	135	Body material	Aluminum, Aluminum
Height (mm)	30	Diffuser material	Tempered glass
Weight (g)	320	Maximal working temperature	+45° C
IP rating	IP 65	Minimal working temperature	-15° C
Finishing colour	Black		

Electrical data

Nominal power (W)	30	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	30
Ballast	Integrated, Integrated		
Insulation class	I, I		

Photometry

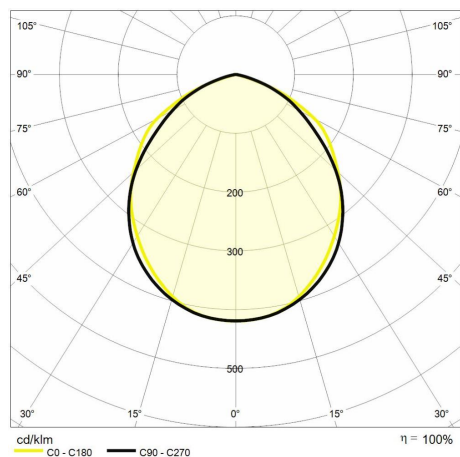

Technical drawing

