

Kost CCT 400mm

KOST CCT 24W 230V IP44
3000/4000/5000K

Cod: **6361170**



IP44

Protected against solid objects larger than 1 mm and splashes



I

Protection class I



CRI >80

Colour rendering index >80



CAM compliant

CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361170 | Category: Outdoor luminaires | Model: Kost CCT 400mm | Product description: KOST CCT 24W 230V IP44 3000/4000/5000K | Source type: SMD | Color temperature (CCT): 3000 / 4000 / 5000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 2250-2350-2350 | Beam angle: 120° | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): D | Diameter (mm): 400 | Height (mm): 70 | Weight (g): 550 | IP rating: IP 44 | IK rating: IK 03 | Finishing colour: White | Body material: Steel | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -20° C | Minimal working temperature: +40° C | Nominal power (W): 24 | Power factor: > 0,5 | Power supply: 220-240V 50/60Hz | Ballast: Included | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD	Beam angle	120°, 120°
Color temperature (CCT)	3000 / 4000 / 5000K	LED Lifetime	50.000 h
Color render index (CRI)	> 80, > 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): D, This contains a light source of energy efficiency class (EU2019/2015): D
MacAdam (SDCM)	< 6		
Lumen output (lm)	2250-2350-2350		


Mechanical data

Diameter (mm)	400	Finishing colour	White
Height (mm)	70	Body material	Steel
Weight (g)	550	Diffuser material	PMMA (polymethyl methacrylate)
IP rating	IP 44	Maximal working temperature	-40° C
IK rating	IK 03	Minimal working temperature	-20° C


Electrical data

Nominal power (W)	24	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	220/240V 50/60Hz	Total quantity per boxing	5
Ballast	Included, Included		
Insulation class	I, I		

Photometry

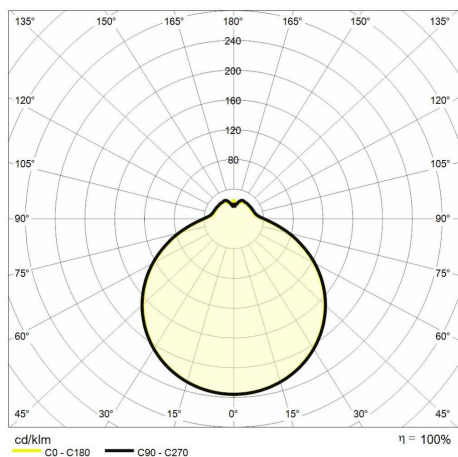

Technical drawing

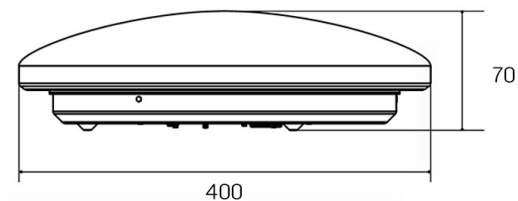

Accessories



Kost accessories 400mm

White RING for KOST/EVO Ø400mm

Cod: 6361117



Kost accessories 400mm

SILVER RING for KOST/EVO Ø400mm

Cod: 6361118