



Domino AS 200W

DOMINO AS/2,0 CCT 200W

Cod: **6361188**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



CAM compliant

CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361188 | Category: Outdoor luminaires | Model: Domino AS 200W | Product description: DOMINO AS/2,0 CCT 200W | Source type: SMD | Color temperature (CCT): 3000 / 3500 / 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 26000-28000 | Beam angle: Asymmetric 40° x 80° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): D | Width (mm): 390 | Length (mm): 306 | Height (mm): 58 | Weight (g): 4100 | IP rating: IP 65 | IK rating: IK 07 | Finishing colour: Grey RAL7024 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +40° C | Nominal power (W): 200 | Power factor: > 0,9 | Power supply: 230-240V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD
Color temperature (CCT)	3000 / 3500 / 4000K
Color render index (CRI)	> 80, > 80
MacAdam (SDCM)	< 6
Lumen output (lm)	26000-28000
Beam angle	Asymmetric 40° x 80°

Photobiological risk	RG1 (low risk), RG1 (low risk)
LED Lifetime	50.000 h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): D, This contains a light source of energy efficiency class (EU2019/2015): D

Mechanical data

Width (mm)	390
Length (mm)	306
Height (mm)	58
Weight (g)	4100
IP rating	IP 65
IK rating	IK 07


Finishing colour	Grey RAL7024
Type of finishing	Polyester powder coated, Polyester powder coated
Body material	Aluminum, Aluminum
Diffuser material	Tempered glass
Maximal working temperature	-40° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	200
Power factor	> 0,9
Power supply	230-240V 50/60Hz
Ballast	Integrated, Integrated
Insulation class	I, I

Dimmable	No
Quantity per package	1
Total quantity per boxing	1

Photometry

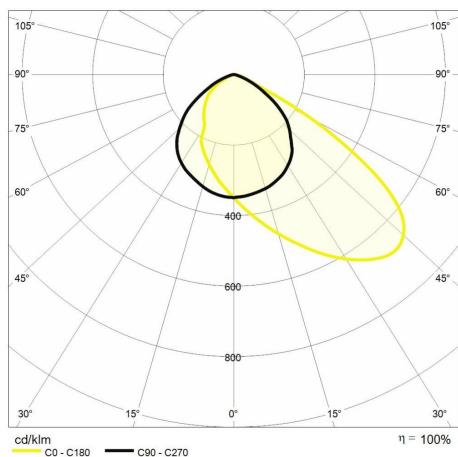

Technical drawing

