

Unica EVO

emergency 1500mm

UNICA EVO EMERGENCY 1h 56W
1500mm

Cod: **6361190**



IP65
Dustproof and protected against
water jets



I
Protection class I



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: 6361190 | Category: Outdoor luminaires | Model: Unica EVO emergency 1200mm | Product description: UNICA EVO EMERGENCY 1h 56W 1200mm | Source type: SMD 2835 | Number of LEDs: 264 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 7280 | Beam angle: 120° | Photobiological risk: RG0 (exempt) | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 150 | Length (mm): 1500 | Height (mm): 60 | Weight (g): 2300 | IP rating: IP 65 | IK rating: IK 08 | Finishing colour: Grey | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -10° C | Minimal working temperature: +40° C | Nominal power (W): 56 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Included | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	120°, 120°
Number of LEDs	264	Photobiological risk	RG0 (exempt)
Color temperature (CCT)	4000K	LED Lifetime	50.000 h
Color render index (CRI)	> 80, > 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E
MacAdam (SDCM)	< 6		
Lumen output (lm)	7280		


Mechanical data

Width (mm)	150	Finishing colour	Grey
Length (mm)	1500	Body material	PC (polycarbonate)
Height (mm)	60	Diffuser material	PC (polycarbonate)
Weight (g)	2300	Maximal working temperature	-40° C
IP rating	IP 65	Minimal working temperature	-10° C
IK rating	IK 08		

Electrical data

Nominal power (W)	56	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	6
Ballast	Included, Included		
Insulation class	I, I		

Photometry

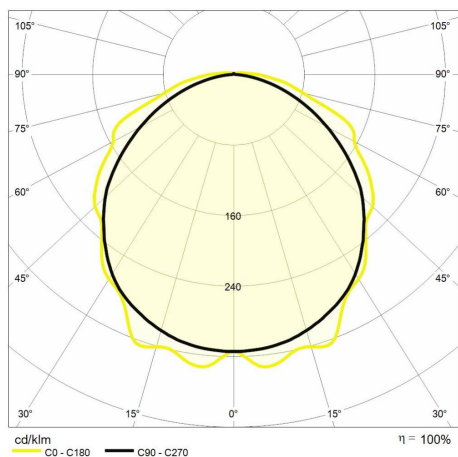

Technical drawing

