

Look round CCT

LOOK CCT DIMMABLE 4W WHITE 60°
IP44 TILTABLE CCT

Cod: **6361192**



IP44

Protected against solid objects larger than 1 mm and splashes



II

Protection class II



CRI >80

Colour rendering index >80



Variable CCT

Selectable colour temperature



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361192 | Category: Indoor luminaires | Model: Downlights | Product description: LOOK CCT DIMMABLE 4W WHITE 60° IP44 TILTABLE CCT | Source type: SMD | Color temperature (CCT): 3000 / 4000 / 6500K | Color render index (CRI): > 80 | MacAdam (SDCM): > 6 | Lumen output (lm): 420 / 480 / 440 | Beam angle: 60° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 25.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): D | Diameter (mm): 80 | Height (mm): 32 | Weight (g): 940 | IP rating: IP 44 (inferiore) | IK rating: IK07 | Finishing colour: Bianco RAL9003 | Type of finishing: Verniciato a polveri di poliestere | Body material: Alluminio | Diffuser material: PC (polycarbonato) | Maximal working temperature: +40° C | Minimal working temperature: -20°C | Power factor: 4 | Power supply: >0,7 | Ballast: 230V 50/60Hz | Insulation class: Included | Dimmable: II | Plug: Yes |

Lighting data

Source type	SMD, SMD
Color temperature (CCT)	3000 / 4000 / 6500K
Color render index (CRI)	> 80, > 80
MacAdam (SDCM)	< 6
Lumen output (lm)	420 / 480 / 440
Beam angle	60°, 60°

Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 25.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): D, This contains a light source of energy efficiency class (EU2019/2015): D

Mechanical data

Height (mm)	32
Weight (g)	940
IP rating	IP 44 (below)
IK rating	IK07
Finishing colour	White RAL9003, White RAL9003


Type of finishing	Polyester powder coated, Polyester powder coated
Body material	Aluminum, Aluminum
Diffuser material	PC (polycarbonate)
Maximal working temperature	-40° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	4
Power factor	0,7
Power supply	230V 50/60Hz, 230V 50/60Hz
Ballast	Included, Included
Insulation class	II

Dimmable	Yes
Quantity per package	1
Total quantity per boxing	60

Photometry

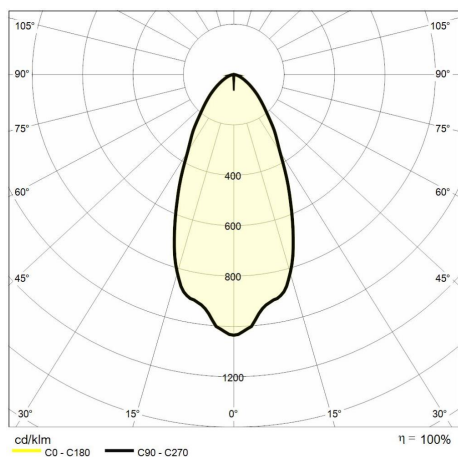

Technical drawing

