



Applique oval CCT

15W

APPLIQUE CCT OVAL 15W IP54
3000/4000K

Cod: **6361196**



IP54
Protected against dust and
splashes



II
Protection class II



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: 6361196 | Category: Outdoor luminaires | Model: Appliques | Product description: APPLIQUE CCT OVAL 15W IP54 3000/4000K | Source type: SMD | Color temperature (CCT): 3000 / 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): > 6 | Lumen output (lm): 1300 / 1400 | Beam angle: 160° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 104 | Length (mm): 230 | Height (mm): 42 | Weight (g): 200 | IP rating: IP 54 | IK rating: IK08 | Finishing colour: Bianco RAL9003 | Body material: PC (polycarbonato) | Maximal working temperature: +50° C | Minimal working temperature: -20°C | Power factor: 15 | Power supply: >0,5 | Ballast: 230V 50/60Hz | Insulation class: Included | Dimmable: II | Plug: No |

Lighting data

Source type	SMD	Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
Color temperature (CCT)	3000 / 4000K	LED Lifetime	L70 B50 50.000h
Color render index (CRI)	> 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
MacAdam (SDCM)	< 6		
Lumen output (lm)	1300 / 1400		
Beam angle	160°		


Mechanical data

Width (mm)	104	IK rating	IK08
Length (mm)	230	Finishing colour	White RAL9003, White RAL9003
Height (mm)	42	Body material	PC (polycarbonate)
Weight (g)	200	Maximal working temperature	+50° C
IP rating	IP 54	Minimal working temperature	-20° C

Electrical data

Nominal power (W)	15	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	20
Ballast	Included, Included		
Insulation class	II		

Photometry

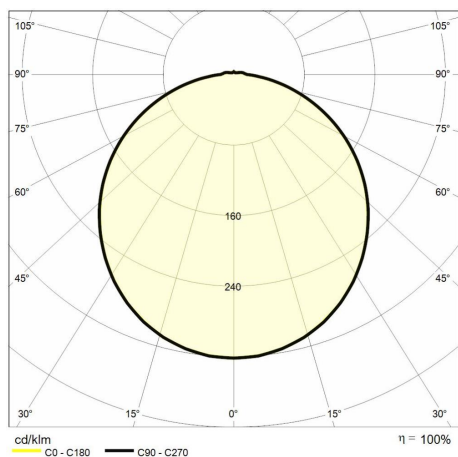

Technical drawing

