



Applique round CCT 24W

APPLIQUE CCT ROUND 24W IP44
3000/4000K

Cod: **6361199**



IP44
Protected against solid objects
larger than 1 mm and splashes



II
Protection class II



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: 6361199 | Category: Outdoor luminaires | Model: Appliques | Product description: APPLIQUE CCT ROUND 24W IP44 3000/4000K | Source type: SMD | Color temperature (CCT): 3000 / 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): > 6 | Lumen output (lm): 2000 / 2150 | Beam angle: 110° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Diameter (mm): 280 | Height (mm): 62 | Weight (g): 700 | IP rating: IP 44 | IK rating: IK07 | Finishing colour: Bianco RAL9003 | Body material: PC (polycarbonato) | Maximal working temperature: +50° C | Minimal working temperature: -20°C | Power factor: 24 | Power supply: >0,9 | Ballast: 230V 50/60Hz | Insulation class: Included | Dimmable: II | Plug: No |

Lighting data

Source type	SMD
Color temperature (CCT)	3000 / 4000K
Color render index (CRI)	> 80
MacAdam (SDCM)	< 6
Lumen output (lm)	2000 / 2150
Beam angle	110°

Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 50.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F

Mechanical data

Diameter (mm)	280
Height (mm)	62
Weight (g)	700
IP rating	IP 44
IK rating	IK07


Finishing colour	White RAL9003, White RAL9003
Body material	PC (polycarbonate)
Maximal working temperature	+50° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	24
Power factor	> 0,9
Power supply	230V 50/60Hz
Ballast	Included, Included
Insulation class	II

Dimmable	No
Quantity per package	1
Total quantity per boxing	10

Photometry

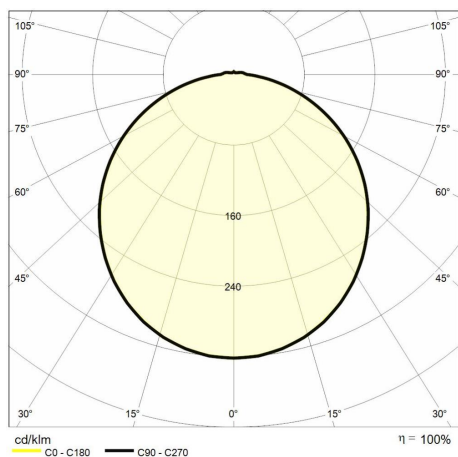

Technical drawing

