



Applique square CCT 24W

APPLIQUE CCT SQUARE 24W IP44
3000/4000K

Cod: **6361200**



IP44

Protected against solid objects larger than 1 mm and splashes



II

Protection class II



CRI >80

Colour rendering index >80



Variable CCT

Selectable colour temperature



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361200 | Category: Outdoor luminaires | Model: Appliques | Product description: APPLIQUE CCT SQUARE 24W IP44 3000/4000K | Source type: SMD | Color temperature (CCT): 3000 / 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): > 6 | Lumen output (lm): 2000 / 2150 | Beam angle: 110° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 25.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 270 | Length (mm): 270 | Height (mm): 62 | Weight (g): 800 | IP rating: IP 44 | IK rating: IK07 | Finishing colour: Bianco RAL9003 | Body material: PC (polycarbonato) | Maximal working temperature: +50° C | Minimal working temperature: -20°C | Power factor: 24 | Power supply: >0,9 | Ballast: 230V 50/60Hz | Insulation class: Included | Dimmable: II | Plug: No |

Lighting data

Source type	SMD
Color temperature (CCT)	3000 / 4000K
Color render index (CRI)	> 80
MacAdam (SDCM)	< 6
Lumen output (lm)	2000 / 2150
Beam angle	110°

Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 25.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F

Mechanical data

Width (mm)	270
Length (mm)	270
Height (mm)	62
Weight (g)	800
IP rating	IP 44


IK rating	IK07
Finishing colour	White RAL9003, White RAL9003
Body material	PC (polycarbonate)
Maximal working temperature	+50° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	24
Power factor	> 0,9
Power supply	230V 50/60Hz
Ballast	Included, Included
Insulation class	II

Dimmable	No
Quantity per package	1
Total quantity per boxing	10

Photometry

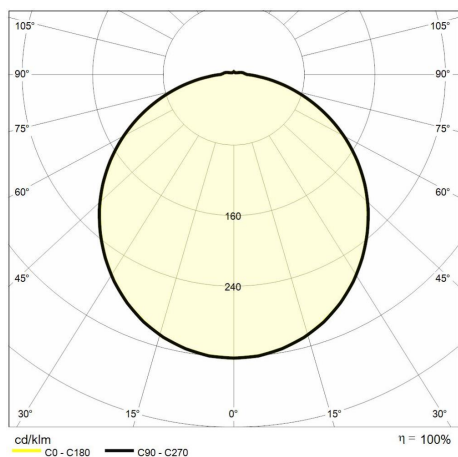

Technical drawing

