



# Domino 2.0 CCT

## 100W

DOMINO 2.0 CCT 100W 230V IP65  
3000/4000/5000K

Cod: **6361208**



IP65  
Dustproof and protected against water jets



I  
Protection class I



CRI >80  
Colour rendering index >80



CAM compliant  
CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



Variable CCT  
Selectable colour temperature



ReeR warranty  
ReeR guarantees the product for a time duration of 3 years



### Technical description

Product code: 6361208 | Category: Outdoor luminaires | Model: Floodlights | Product description: DOMINO 2.0 CCT 100W 230V IP65 3000/4000/5000K | Source type: SMD | Color temperature (CCT): 3000 / 4000 / 5000K | Color render index (CRI): > 80 | MacAdam (SDCM): > 6 | Lumen output (lm): 14000 / 15800 / 14500 | Beam angle: 110° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): C | Width (mm): 300 | Length (mm): 222 | Height (mm): 45 | Weight (g): 1895 | IP rating: IP 65 | IK rating: IK07 | Finishing colour: Nero RAL7021 | Type of finishing: Verniciato a polveri di poliestere | Body material: Alluminio | Diffuser material: Vetro temprato | Maximal working temperature: +50° C | Minimal working temperature: -20°C | Power factor: 100 | Power supply: >0,9 | Ballast: 230V 50/60Hz | Insulation class: Integrated | Dimmable: I | Plug: No |

## Lighting data

|                          |                       |
|--------------------------|-----------------------|
| Source type              | SMD, SMD              |
| Color temperature (CCT)  | 3000 / 4000 / 5000K   |
| Color render index (CRI) | > 80, > 80            |
| MacAdam (SDCM)           | < 6                   |
| Lumen output (lm)        | 14000 / 15800 / 14500 |
| Beam angle               | 110°                  |

|                         |                                                                          |
|-------------------------|--------------------------------------------------------------------------|
| Photobiological risk    | Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)                         |
| LED Lifetime            | L70 B50 50.000h, L70 B50 50.000h                                         |
| Energy efficiency class | This contains a light source of energy efficiency class (EU2019/2015): C |

## Mechanical data

|             |       |
|-------------|-------|
| Width (mm)  | 300   |
| Length (mm) | 222   |
| Height (mm) | 45    |
| Weight (g)  | 1895  |
| IP rating   | IP 65 |
| IK rating   | IK07  |


|                             |                                                  |
|-----------------------------|--------------------------------------------------|
| Finishing colour            | Black RAL7021                                    |
| Type of finishing           | Polyester powder coated, Polyester powder coated |
| Body material               | Aluminum, Aluminum                               |
| Diffuser material           | Tempered glass                                   |
| Maximal working temperature | +50° C                                           |
| Minimal working temperature | -20° C                                           |

## Electrical data

|                   |                            |
|-------------------|----------------------------|
| Nominal power (W) | 100                        |
| Power factor      | > 0,9                      |
| Power supply      | 230V 50/60Hz, 230V 50/60Hz |
| Ballast           | Integrated, Integrated     |
| Insulation class  | I, I                       |

|                           |    |
|---------------------------|----|
| Dimmable                  | No |
| Quantity per package      | 1  |
| Total quantity per boxing | 5  |

## Photometry

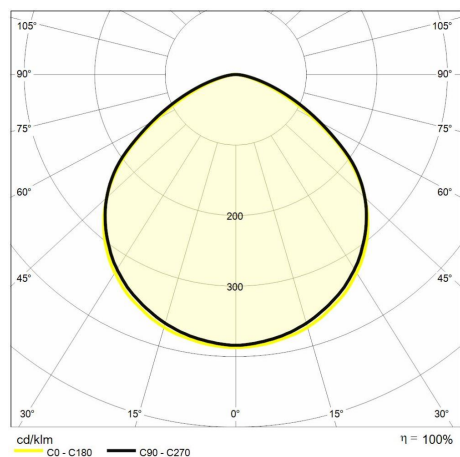

## Technical drawing

