



Domino 2.0 CCT

300W

DOMINO 2.0 CCT 300W 230V IP65
3000/4000/5000K

Cod: **6361211**



IP65
Dustproof and protected against water jets



I
Protection class I



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361211 | Category: Outdoor luminaires | Model: Floodlights | Product description: DOMINO 2.0 CCT 300W 230V IP65 3000/4000/5000K | Source type: SMD | Color temperature (CCT): 3000 / 4000 / 5000K | Color render index (CRI): > 80 | MacAdam (SDCM): > 6 | Lumen output (lm): 41400 / 46000 / 42000 | Beam angle: 110° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): D | Width (mm): 480 | Length (mm): 384 | Height (mm): 63 | Weight (g): 6195 | IP rating: IP 65 | IK rating: IK07 | Finishing colour: Nero RAL7021 | Type of finishing: Verniciato a polveri di poliestere | Body material: Alluminio | Diffuser material: Vetro temprato | Maximal working temperature: +50° C | Minimal working temperature: -20°C | Power factor: 300 | Power supply: >0,9 | Ballast: 230V 50/60Hz | Insulation class: Integrated | Dimmable: I | Plug: No |

Lighting data

Source type	SMD, SMD
Color temperature (CCT)	3000 / 4000 / 5000K
Color render index (CRI)	> 80, > 80
MacAdam (SDCM)	< 6
Lumen output (lm)	41400 / 46000 / 42000
Beam angle	110°

Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 50.000h, L70 B50 50.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): D, This contains a light source of energy efficiency class (EU2019/2015): D

Mechanical data

Width (mm)	480
Length (mm)	384
Height (mm)	63
Weight (g)	6195
IP rating	IP 65
IK rating	IK07


Finishing colour	Black RAL7021
Type of finishing	Polyester powder coated, Polyester powder coated
Body material	Aluminum, Aluminum
Diffuser material	Tempered glass
Maximal working temperature	+50° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	300
Power factor	> 0,9
Power supply	230V 50/60Hz, 230V 50/60Hz
Ballast	Integrated, Integrated
Insulation class	I, I

Dimmable	No
Quantity per package	1
Total quantity per boxing	1

Photometry

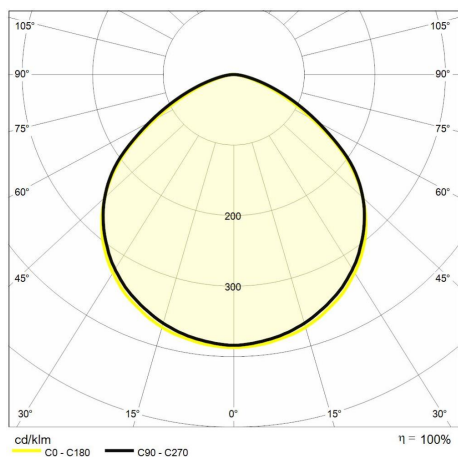

Technical drawing

