



Tablet V CCT 10W

TABLET V CCT 10W IP65 BLACK

Cod: **6361228**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



Variable CCT

Selectable colour temperature



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361228 | Category: Outdoor luminaires | Model: Floodlights | Product description: TABLET V CCT 10W IP65 BLACK | Source type: SMD | Color temperature (CCT): 3000 / 4000 / 6500K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1182 / 1286 / 1150 | Beam angle: 110° | BUG Rating: Risk Group 0 (exempt) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 132 | Length (mm): 111 | Height (mm): 28 | Weight (g): 265 | IP rating: IP 65 | IK rating: IK05 | Finishing colour: Black RAL9005 | Body material: Aluminium | Diffuser material: Tempered glass | Maximal working temperature: +45° C | Minimal working temperature: - 40° C | Nominal power (W): 10 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD
Color temperature (CCT)	3000 / 4000 / 6500K
Color render index (CRI)	> 80, > 80
MacAdam (SDCM)	< 6
Lumen output (lm)	1182 / 1286 / 1150
Beam angle	110°

Photobiological risk	Risk Group 0 (exempt)
LED Lifetime	L70 B50 50.000h, L70 B50 50.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E, This contains a light source of energy efficiency class (EU2019/2015): E

Mechanical data

Width (mm)	132
Length (mm)	111
Height (mm)	28
Weight (g)	265
IP rating	IP 65
IK rating	IK05


Finishing colour	Black RAL9005, Black RAL9005
Body material	Aluminium, Aluminum
Diffuser material	Tempered glass, Tempered glass
Maximal working temperature	+45° C
Minimal working temperature	+40° C

Electrical data

Nominal power (W)	10
Power factor	> 0,9
Power supply	230V 50/60Hz, 230V 50/60Hz
Ballast	Integrated, Integrated
Insulation class	I, I

Dimmable	No
Quantity per package	1
Total quantity per boxing	40

Photometry

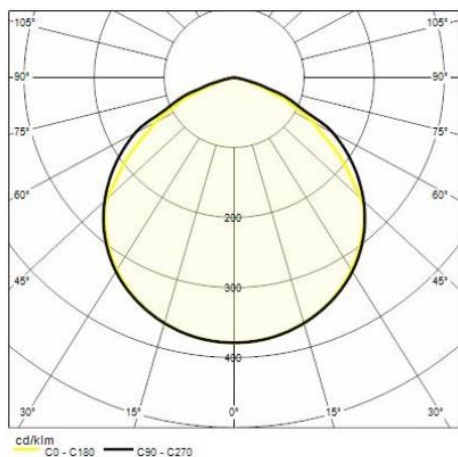

Technical drawing

