



# Tablet V CCT 20W

TABLET V CCT 20W IP65 BLACK

Cod: **6361229**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



Variable CCT

Selectable colour temperature



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: 6361229 | Category: Outdoor luminaires | Model: Floodlights | Product description: TABLET V CCT 20W IP65 BLACK | Source type: SMD | Color temperature (CCT): 3000 / 4000 / 6500K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 2327 / 2665 / 2380 | Beam angle: 110° | BUG Rating: Risk Group 0 (exempt) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 132 | Length (mm): 111 | Height (mm): 28 | Weight (g): 288 | IP rating: IP 65 | IK rating: IK05 | Finishing colour: Black RAL9005 | Body material: Aluminium | Diffuser material: Tempered glass | Maximal working temperature: +45° C | Minimal working temperature: - 40° C | Nominal power (W): 20 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

## Lighting data

|                          |                     |
|--------------------------|---------------------|
| Source type              | SMD, SMD            |
| Color temperature (CCT)  | 3000 / 4000 / 6500K |
| Color render index (CRI) | > 80, > 80          |
| MacAdam (SDCM)           | < 6                 |
| Lumen output (lm)        | 2327 / 2665 / 2380  |
| Beam angle               | 110°                |

|                         |                                                                                                                                                    |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Photobiological risk    | Risk Group 0 (exempt)                                                                                                                              |
| LED Lifetime            | L70 B50 50.000h, L70 B50 50.000h                                                                                                                   |
| Energy efficiency class | This contains a light source of energy efficiency class (EU2019/2015): E, This contains a light source of energy efficiency class (EU2019/2015): E |

## Mechanical data

|             |       |
|-------------|-------|
| Width (mm)  | 132   |
| Length (mm) | 111   |
| Height (mm) | 28    |
| Weight (g)  | 288   |
| IP rating   | IP 65 |
| IK rating   | IK05  |


|                             |                                |
|-----------------------------|--------------------------------|
| Finishing colour            | Black RAL9005, Black RAL9005   |
| Body material               | Aluminium, Aluminum            |
| Diffuser material           | Tempered glass, Tempered glass |
| Maximal working temperature | +45° C                         |
| Minimal working temperature | +40° C                         |

## Electrical data

|                   |                            |
|-------------------|----------------------------|
| Nominal power (W) | 20                         |
| Power factor      | > 0,9                      |
| Power supply      | 230V 50/60Hz, 230V 50/60Hz |
| Ballast           | Integrated, Integrated     |
| Insulation class  | I, I                       |

|                           |    |
|---------------------------|----|
| Dimmable                  | No |
| Quantity per package      | 1  |
| Total quantity per boxing | 40 |

## Photometry

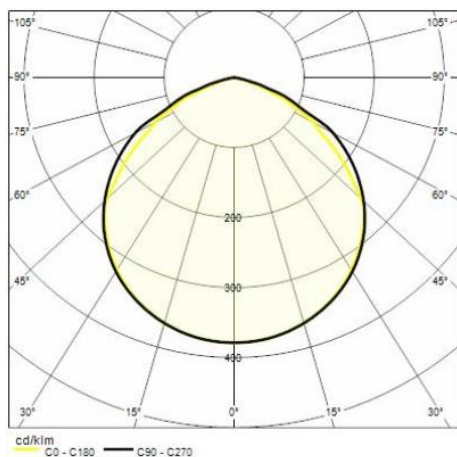

## Technical drawing

