




Tablet V Power 100W

TABLET V POWER 100W IP65 BLACK
4000K

Cod: **6361232**

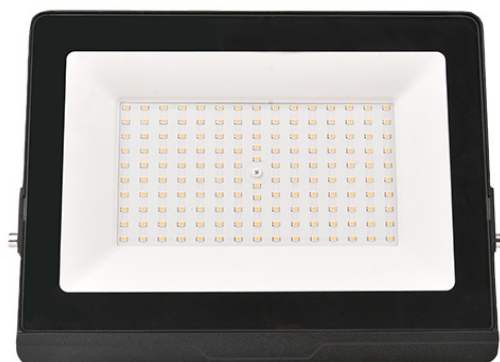

IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



CAM compliant

CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361232 | Category: Outdoor luminaires | Model: Floodlights | Product description: TABLET POWER 100W IP65 BLACK 4000K | Source type: SMD | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 12325 | Beam angle: 110° | BUG Rating: Risk Group 0 (exempt) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 285 | Length (mm): 226 | Height (mm): 30,5 | Weight (g): 1260 | IP rating: IP 65 | IK rating: IK06 | Finishing colour: Black RAL9005 | Body material: Aluminium | Diffuser material: Tempered glass | Maximal working temperature: +45° C | Minimal working temperature: - 40° C | Nominal power (W): 100 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD
Color temperature (CCT)	4000K
Color render index (CRI)	> 80, > 80
MacAdam (SDCM)	< 6
Lumen output (lm)	12325
Beam angle	110°

Photobiological risk	Risk Group 0 (exempt)
LED Lifetime	L70 B50 50.000h, L70 B50 50.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E, This contains a light source of energy efficiency class (EU2019/2015): E

Mechanical data

Width (mm)	285
Length (mm)	226
Height (mm)	30,5
Weight (g)	1260
IP rating	IP 65
IK rating	IK06


Finishing colour	Black RAL9005, Black RAL9005
Body material	Aluminium, Aluminum
Diffuser material	Tempered glass, Tempered glass
Maximal working temperature	+45° C
Minimal working temperature	+40° C

Electrical data

Nominal power (W)	100
Power factor	> 0,9
Power supply	230V 50/60Hz, 230V 50/60Hz
Ballast	Integrated, Integrated
Insulation class	I, I

Dimmable	No
Quantity per package	1
Total quantity per boxing	5

Photometry

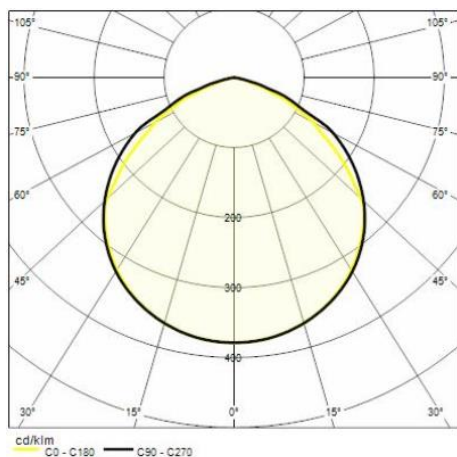

Technical drawing

