




Tablet V Power 100W

TABLET V POWER 100W IP65 BLACK
6500K

Cod: **6361233**

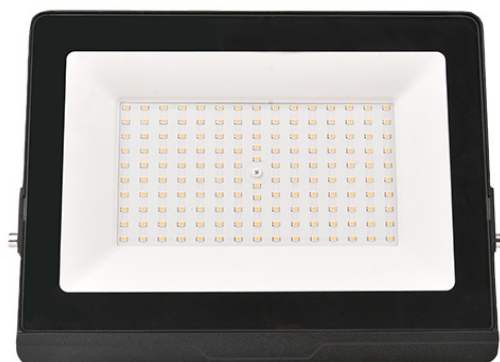

IP65
Dustproof and protected against
water jets



I
Protection class I



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: 6361233 | Category: Outdoor luminaires | Model: Floodlights | Product description: TABLET POWER 100W IP65 BLACK 6500K | Source type: SMD | Color temperature (CCT): 6500K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 12121 | Beam angle: 110° | BUG Rating: Risk Group 0 (exempt) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 285 | Length (mm): 226 | Height (mm): 30,5 | Weight (g): 1260 | IP rating: IP 65 | IK rating: IK06 | Finishing colour: Black RAL9005 | Body material: Aluminium | Diffuser material: Tempered glass | Maximal working temperature: +45° C | Minimal working temperature: - 40° C | Nominal power (W): 100 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD	Photobiological risk	
Color temperature (CCT)		LED Lifetime	L70 B50 50.000h
Color render index (CRI)	> 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E
MacAdam (SDCM)	< 6		
Lumen output (lm)			
Beam angle			


Mechanical data

Width (mm)		Finishing colour	Black RAL9005
Length (mm)		Body material	Aluminum
Height (mm)		Diffuser material	Tempered glass
Weight (g)		Maximal working temperature	+45° C
IP rating	IP 65	Minimal working temperature	
IK rating			

Electrical data

Nominal power (W)	100	Dimmable	No
Power factor		Quantity per package	
Power supply	230V 50/60Hz	Total quantity per boxing	
Ballast	Integrated		
Insulation class	I		

Photometry

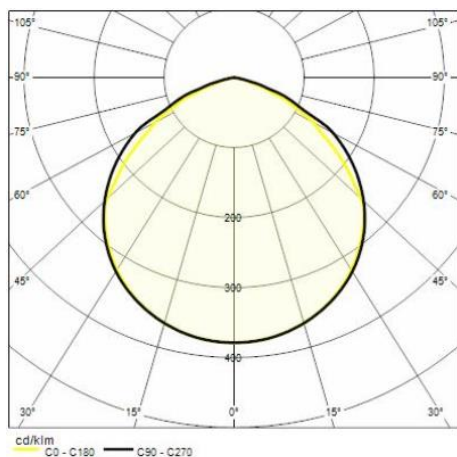

Technical drawing

