



Rubik R CCT

RUBIK R CCT 12W IP54 WHITE
ADJUSTABLE FINNED

Cod: **6361234**



IP54
Protected against dust and
splashes



I
Protection class I



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: 6361234 | Category: Outdoor luminaires | Model: Appliques | Product description: RUBIK R CCT 12W IP54 WHITE ADJUSTABLE FINNED | Source type: COB | Color temperature (CCT): 3000 / 4000 / 6000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 5 | Lumen output (lm): 970 / 1048 / 980 | Beam angle: 120° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 136 | Length (mm): 100 | Height (mm): 116 | Weight (g): 700 | IP rating: IP54 | IK rating: IK03 | Finishing colour: White RAL9003 | Body material: Aluminium | Diffuser material: Tempered glass | Maximal working temperature: +45° C | Minimal working temperature: -20° C | Nominal power (W): 12 | Power factor: > 0,8 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	COB, COB
Color temperature (CCT)	3000 / 4000 / 6000K
Color render index (CRI)	> 80, > 80
MacAdam (SDCM)	< 5, < 5
Lumen output (lm)	970 / 1048 / 980
Beam angle	120°, 120°

Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 50.000h, L70 B50 50.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F

Mechanical data

Width (mm)	136
Length (mm)	100
Height (mm)	116
Weight (g)	700
IP rating	IP54, IP54
IK rating	IK03, IK03


Finishing colour	White RAL9003, White RAL9003
Body material	Aluminium, Aluminum
Diffuser material	Tempered glass, Tempered glass
Maximal working temperature	+45° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	12
Power factor	> 0,8, > 0,8
Power supply	230V 50/60Hz, 230V 50/60Hz
Ballast	Integrated, Integrated
Insulation class	I, I

Dimmable	No
Quantity per package	1
Total quantity per boxing	20

Photometry

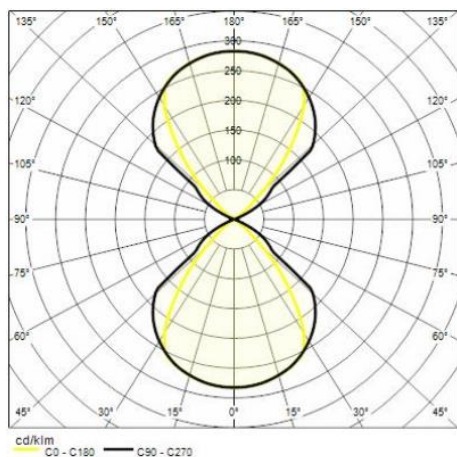

Technical drawing

