



# Rubik R CCT

RUBIK R CCT 12W IP54 ANTHRACITE  
ADJUSTABLE FINNED

Cod: **6361236**



IP54  
Protected against dust and  
splashes



I  
Protection class I



CRI >80  
Colour rendering index >80



CAM compliant  
CAM (Minimum Environmental  
Criteria) compliant product for  
indoor and outdoor installation



Variable CCT  
Selectable colour temperature



ReeR warranty  
ReeR guarantees the product for a  
time duration of 3 years



## Technical description

Product code: 6361236 | Category: Outdoor luminaires | Model: Appliques | Product description: RUBIK R CCT 12W IP54 ANTHRACITE ADJUSTABLE FINNED | Source type: COB | Color temperature (CCT): 3000 / 4000 / 6000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 5 | Lumen output (lm): 970 / 1048 / 980 | Beam angle: 120° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 136 | Length (mm): 100 | Height (mm): 116 | Weight (g): 700 | IP rating: IP54 | IK rating: IK03 | Finishing colour: Anthracite RAL7016 | Body material: Aluminium | Diffuser material: Tempered glass | Maximal working temperature: +45° C | Minimal working temperature: -20° C | Nominal power (W): 12 | Power factor: > 0,8 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

## Lighting data

|                          |                     |
|--------------------------|---------------------|
| Source type              | COB, COB            |
| Color temperature (CCT)  | 3000 / 4000 / 6000K |
| Color render index (CRI) | > 80, > 80          |
| MacAdam (SDCM)           | < 5, < 5            |
| Lumen output (lm)        | 970 / 1048 / 980    |
| Beam angle               | 120°, 120°          |

|                         |                                                                          |
|-------------------------|--------------------------------------------------------------------------|
| Photobiological risk    | Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)                         |
| LED Lifetime            | L70 B50 50.000h, L70 B50 50.000h                                         |
| Energy efficiency class | This contains a light source of energy efficiency class (EU2019/2015): F |

## Mechanical data

|             |            |
|-------------|------------|
| Width (mm)  | 136        |
| Length (mm) | 100        |
| Height (mm) | 116        |
| Weight (g)  | 700        |
| IP rating   | IP54, IP54 |
| IK rating   | IK03, IK03 |


|                             |                                |
|-----------------------------|--------------------------------|
| Finishing colour            | Anthracite RAL7016             |
| Body material               | Aluminium, Aluminum            |
| Diffuser material           | Tempered glass, Tempered glass |
| Maximal working temperature | +45° C                         |
| Minimal working temperature | -20° C                         |

## Electrical data

|                   |                            |
|-------------------|----------------------------|
| Nominal power (W) | 12                         |
| Power factor      | > 0,8, > 0,8               |
| Power supply      | 230V 50/60Hz, 230V 50/60Hz |
| Ballast           | Integrated, Integrated     |
| Insulation class  | I, I                       |

|                           |    |
|---------------------------|----|
| Dimmable                  | No |
| Quantity per package      | 1  |
| Total quantity per boxing | 20 |

## Photometry

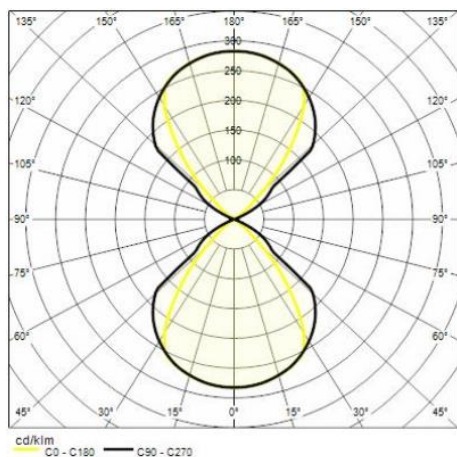

## Technical drawing

