




Rubik 2 CCT

RUBIK 2 CCT 24W IP54 ANTHRACITE
ADJUSTABLE FINNED

Cod: **6361242**

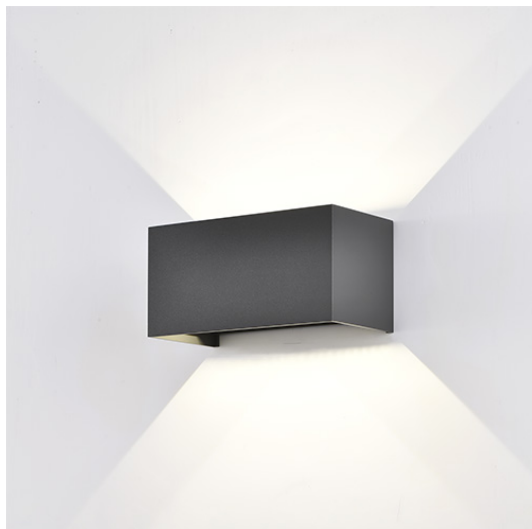

IP54
Protected against dust and
splashes



I
Protection class I



CRI >80
Colour rendering index >80



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: 6361242 | Category: Outdoor luminaires | Model: Appliques | Product description: RUBIK 2 CCT 24W IP54 ANTHRACITE ADJUSTABLE FINNED | Source type: COB | Color temperature (CCT): 3000 / 4000 / 6000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 5 | Lumen output (lm): 1740 / 1883 / 1795 | Beam angle: 120° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 200 | Length (mm): 100 | Height (mm): 100 | Weight (g): 1100 | IP rating: IP54 | IK rating: IK03 | Finishing colour: Anthracite RAL7016 | Body material: Aluminium | Diffuser material: Tempered glass | Maximal working temperature: +45° C | Minimal working temperature: -20° C | Nominal power (W): 24 | Power factor: > 0,8 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	COB, COB	Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
Color temperature (CCT)	3000 / 4000 / 6000K	LED Lifetime	L70 B50 50.000h, L70 B50 50.000h
Color render index (CRI)	> 80, > 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
MacAdam (SDCM)	< 5, < 5		
Lumen output (lm)	1740 / 1883 / 1795		
Beam angle	120°, 120°		


Mechanical data

Width (mm)	200	Finishing colour	Anthracite RAL7016
Length (mm)	100	Body material	Aluminium, Aluminum
Height (mm)	100	Diffuser material	Tempered glass, Tempered glass
Weight (g)	1100	Maximal working temperature	+45° C
IP rating	IP54, IP54	Minimal working temperature	-20° C
IK rating	IK03, IK03		

Electrical data

Nominal power (W)	24	Dimmable	No
Power factor	> 0,8, > 0,8	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	10
Ballast	Integrated, Integrated		
Insulation class	I, I		

Photometry

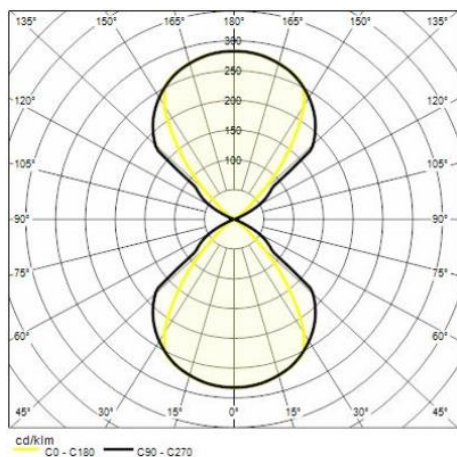

Technical drawing

