



Ellisse 2

ELLISSE 2 IP54 10W ANTHRACITE 3000K

Cod: **6361261**



IP54
Protected against dust and splashes



I
Protection class I



CRI >90
Colour rendering index >90



CAM compliant
CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361261 | Category: Outdoor luminaires | Model: Appliques | Product description: ELLISSE 2 IP54 10W ANTHRACITE 3000K | Source type: SMD | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 6 | Lumen output (lm): 1000 | Beam angle: 122° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): G | Width (mm): 100 | Length (mm): 110 | Height (mm): 68 | Weight (g): 700 | IP rating: IP54 | IK rating: IK06 | Finishing colour: Anthracite RAL7011 | Body material: Aluminium | Diffuser material: Tempered glass | Maximal working temperature: +45° C | Minimal working temperature: -20° C | Nominal power (W): 10 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD	Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
Color temperature (CCT)	3000K	LED Lifetime	L70 B50 50.000h, L70 B50 50.000h
Color render index (CRI)	> 90, > 90	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): G
MacAdam (SDCM)	< 6		
Lumen output (lm)	1000		
Beam angle	122°		


Mechanical data

Width (mm)	100	Finishing colour	Anthracite RAL7011
Length (mm)	110	Body material	Aluminium, Aluminum
Height (mm)	68	Diffuser material	Tempered glass, Tempered glass
Weight (g)	700	Maximal working temperature	+45° C
IP rating	IP54, IP54	Minimal working temperature	-20° C
IK rating	IK06		

Electrical data

Nominal power (W)	10	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	20
Ballast	Integrated, Integrated		
Insulation class	I, I		

Photometry

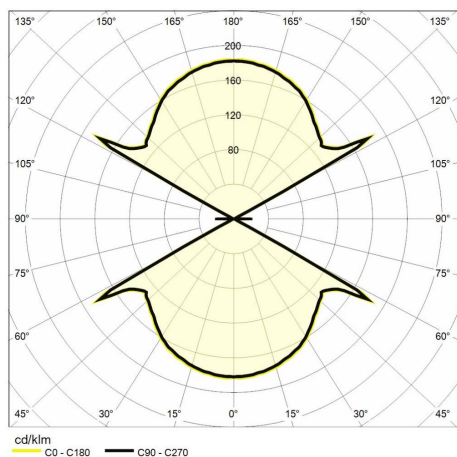

Technical drawing

