



Step Square

STEP SQUARE 3W IP65 WHITE 3000K

Cod: **6361271**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361271 | Category: Outdoor luminaires | Model: Step Lights | Product description: STEP SQUARE 3W IP65 WHITE 3000K | Source type: SMD | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 158 | Beam angle: 89° | BUG Rating: Risk Group 0 (exempt) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): G | Width (mm): 110 | Length (mm): 110 | Height (mm): 30 | Weight (g): 270 | IP rating: IP 65 | IK rating: IK06 | Finishing colour: White RAL9003 | Body material: Aluminium | Diffuser material: Polycarbonate | Maximal working temperature: +45° C | Minimal working temperature: -20° C | Nominal power (W): 3 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD	Photobiological risk	Risk Group 0 (exempt)
Color temperature (CCT)	3000K	LED Lifetime	L70 B50 50.000h, L70 B50 50.000h
Color render index (CRI)	> 80, > 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): G
MacAdam (SDCM)	< 6		
Lumen output (lm)	158		
Beam angle	89°		


Mechanical data

Width (mm)	110	Finishing colour	White RAL9003, White RAL9003
Length (mm)	110	Body material	Aluminium, Aluminum
Height (mm)	30	Diffuser material	Polycarbonate
Weight (g)	270	Maximal working temperature	+45° C
IP rating	IP 65	Minimal working temperature	-20° C
IK rating	IK06		

Electrical data

Nominal power (W)	3	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	50
Ballast	Integrated, Integrated		
Insulation class	I, I		

Photometry

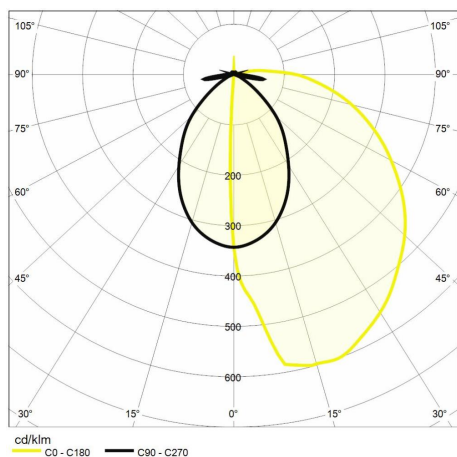

Technical drawing

