

# Tratto 2 CCT

## TRATTO 2 CCT 16W BLACK IP65

Cod: **6361277**



IP65  
Dustproof and protected against water jets



I  
Protection class I



CRI >80  
Colour rendering index >80



Variable CCT  
Selectable colour temperature



ReeR warranty  
ReeR guarantees the product for a time duration of 3 years



### Technical description

Product code: 6361277 | Category: Outdoor luminaires | Model: Appliques | Product description: TRATTO 2 CCT 16W BLACK IP65 | Source type: SMD | Color temperature (CCT): 3000 / 3500 / 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 5 | Lumen output (lm): 1001 / 1114 / 1063 | Beam angle: 120° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 70 | Length (mm): 223 | Height (mm): 52 | Weight (g): 750 | IP rating: IP65 | IK rating: IK08 | Finishing colour: Black RAL9005 | Body material: Aluminium | Diffuser material: Polycarbonate | Maximal working temperature: +40° C | Minimal working temperature: -15° C | Nominal power (W): 16 | Power factor: > 0,8 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

## Lighting data

|                          |                     |
|--------------------------|---------------------|
| Source type              | SMD, SMD            |
| Color temperature (CCT)  | 3000 / 3500 / 4000K |
| Color render index (CRI) | > 80, > 80          |
| MacAdam (SDCM)           | < 5, < 5            |
| Lumen output (lm)        | 1001 / 1114 / 1063  |
| Beam angle               | 120°, 120°          |

|                         |                                                                                                                                                    |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Photobiological risk    | Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)                                                                                                   |
| LED Lifetime            | L70 B50 50.000h, L70 B50 50.000h                                                                                                                   |
| Energy efficiency class | This contains a light source of energy efficiency class (EU2019/2015): E, This contains a light source of energy efficiency class (EU2019/2015): E |

## Mechanical data

|             |      |
|-------------|------|
| Width (mm)  | 70   |
| Length (mm) | 223  |
| Height (mm) | 52   |
| Weight (g)  | 750  |
| IP rating   | IP65 |
| IK rating   | IK08 |


|                             |                              |
|-----------------------------|------------------------------|
| Finishing colour            | Black RAL9005, Black RAL9005 |
| Body material               | Aluminium, Aluminum          |
| Diffuser material           | Polycarbonate                |
| Maximal working temperature | -40° C                       |
| Minimal working temperature | -15° C                       |

## Electrical data

|                   |                            |
|-------------------|----------------------------|
| Nominal power (W) | 16                         |
| Power factor      | > 0,8, > 0,8               |
| Power supply      | 230V 50/60Hz, 230V 50/60Hz |
| Ballast           | Integrated, Integrated     |
| Insulation class  | I, I                       |

|                           |    |
|---------------------------|----|
| Dimmable                  | No |
| Quantity per package      | 1  |
| Total quantity per boxing | 10 |

## Photometry

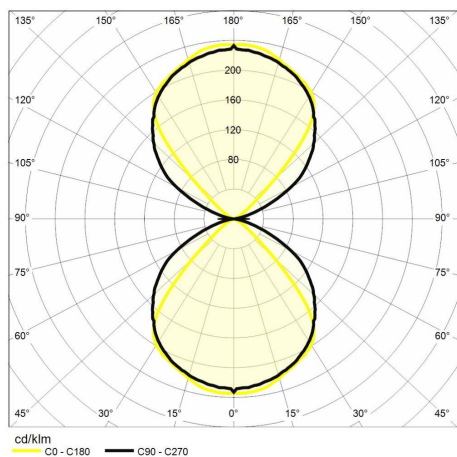

## Technical drawing

