

Tratto 2 CCT

TRATTO 2 CCT 16W CORTEN IP65

Cod: **6361278**



IP65
Dustproof and protected against water jets



I
Protection class I



CRI >80
Colour rendering index >80



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361278 | Category: Outdoor luminaires | Model: Appliques | Product description: TRATTO 2 CCT 16W CORTEN IP65 | Source type: SMD | Color temperature (CCT): 3000 / 3500 / 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 5 | Lumen output (lm): 1001 / 1114 / 1063 | Beam angle: 120° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 70 | Length (mm): 223 | Height (mm): 52 | Weight (g): 750 | IP rating: IP65 | IK rating: IK08 | Finishing colour: Corten RAL 8028 | Body material: Aluminium | Diffuser material: Polycarbonate | Maximal working temperature: +40° C | Minimal working temperature: -15° C | Nominal power (W): 16 | Power factor: > 0,8 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD
Color temperature (CCT)	3000 / 3500 / 4000K
Color render index (CRI)	> 80, > 80
MacAdam (SDCM)	< 5, < 5
Lumen output (lm)	1001 / 1114 / 1063
Beam angle	120°, 120°

Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 50.000h, L70 B50 50.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E, This contains a light source of energy efficiency class (EU2019/2015): E

Mechanical data

Width (mm)	70
Length (mm)	223
Height (mm)	52
Weight (g)	750
IP rating	IP65
IK rating	IK08


Finishing colour	Corten RAL 8028
Body material	Aluminium, Aluminum
Diffuser material	Polycarbonate
Maximal working temperature	-40° C
Minimal working temperature	-15° C

Electrical data

Nominal power (W)	16
Power factor	> 0,8, > 0,8
Power supply	230V 50/60Hz, 230V 50/60Hz
Ballast	Integrated, Integrated
Insulation class	I, I

Dimmable	No
Quantity per package	1
Total quantity per boxing	10

Photometry

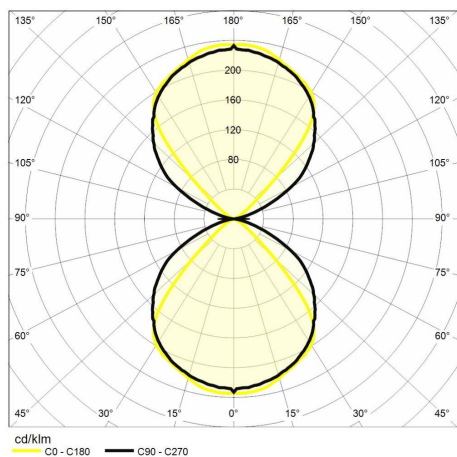

Technical drawing

