

Miniled Track Light CCT 1200mm

MINILED TRACK CCT 24W BLACK IP20

Cod: **6361289**



IP20
Protected from solid bodies larger than 12 mm



II
Protection class II



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361289 | Category: Indoor luminaires | Model: Track Reglette | Product description: MINILED TRACK CCT 24W BLACK IP20 | Source type: SMD | Color temperature (CCT): 3000 / 4000 / 6500K | Color render index (CRI): > 80 | MacAdam (SDCM): < 5 | Lumen output (lm): 2160 / 2400 / 2640 | Beam angle: 130° | BUG Rating: Risk Group 0 (exempt) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 65 | Length (mm): 1200 | Height (mm): 35 | Weight (g): 350 | IP rating: IP20 | IK rating: IK05 | Finishing colour: Black RAL9011 | Body material: Polycarbonate | Maximal working temperature: +40° C | Minimal working temperature: -20° C | Nominal power (W): 24 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD, SMD
Color temperature (CCT)	3000 / 4000 / 6500K
Color render index (CRI)	> 80, > 80
MacAdam (SDCM)	< 5, < 5
Lumen output (lm)	2160 / 2400 / 2640
Beam angle	130°

Photobiological risk	Risk Group 0 (exempt)
LED Lifetime	L70 B50 50.000h, L70 B50 50.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E, This contains a light source of energy efficiency class (EU2019/2015): E

Mechanical data

Width (mm)	65
Length (mm)	1200
Height (mm)	35
Weight (g)	350
IP rating	IP20


IK rating	IK05
Finishing colour	Black RAL9011
Body material	Polycarbonate
Maximal working temperature	-40° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	24
Power factor	> 0,5
Power supply	230V 50/60Hz, 230V 50/60Hz
Ballast	Integrated, Integrated
Insulation class	II

Dimmable	No
Quantity per package	1
Total quantity per boxing	20

Photometry

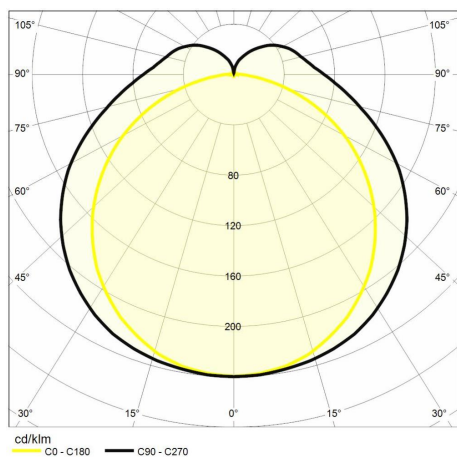

Technical drawing

