



Nuvola

NUVOLA 10W IP54 ANTHRACITE 4000K

Cod: **6361310**



IP54
Protected against dust and
splashes



I
Protection class I



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: 6361310 | Category: Outdoor luminaires | Model: Appliques | Product description: NUVOLA 10W IP54 ANTHRACITE 4000K | Source type: SMD | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 860 | Beam angle: 97° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 50.000h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): G | Width (mm): 180 | Length (mm): 90 | Height (mm): 38 | Weight (g): 560 | IP rating: IP54 | IK rating: IK08 | Finishing colour: Anthracite RAL7011 | Body material: Aluminium | Diffuser material: Polycarbonate | Maximal working temperature: +45° C | Minimal working temperature: -20° C | Nominal power (W): 10 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD, SMD	Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
Color temperature (CCT)	4000K	LED Lifetime	L70 B50 50.000h, L70 B50 50.000h
Color render index (CRI)	> 80, > 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): G
MacAdam (SDCM)	< 6		
Lumen output (lm)	860		
Beam angle	97°		


Mechanical data

Width (mm)	180	Finishing colour	Anthracite RAL7011
Length (mm)	90	Body material	Aluminium, Aluminum
Height (mm)	38	Diffuser material	Polycarbonate
Weight (g)	560	Maximal working temperature	+45° C
IP rating	IP54, IP54	Minimal working temperature	-20° C
IK rating	IK08		

Electrical data

Nominal power (W)	10	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz, 230V 50/60Hz	Total quantity per boxing	20
Ballast	Integrated, Integrated		
Insulation class	I, I		

Photometry

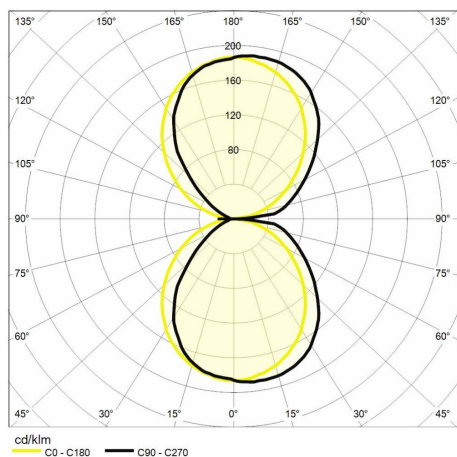

Technical drawing

