



Applique Ovale CCT sensor 15w

APPLIQUE CCT OVAL 15W WITH
SENSOR

Cod: **6361330**



IP54
Protected against dust and splashes



II
Protection class II



CRI >80
Colour rendering index >80



Sensor
Equipped with light and motion sensor



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361330 | Category: Appliques | Model: Applique oval | Product description: APPLIQUE CCT OVAL 15W WITH SENSOR | Source type: SMD | Color temperature (CCT): 3000 / 4000 / 6500K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1668 / 1798 / 1813 | Beam angle: 110° | BUG Rating: Risk Group 1 (Low Risk) | LED Lifetime: L70 B50 20.000h | Width (mm): 221 | Length (mm): 131 | Height (mm): 68 | Weight (g): 333 | IP rating: IP54 | IK rating: IK08 | Finishing colour: White RAL9003 | Body material: Polycarbonate | Diffuser material: Polycarbonate | Maximal working temperature: +45° C | Minimal working temperature: -40° C | Nominal power (W): 15 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Included | Insulation class: II | Dimmable: No | Quantity per package: 1 |

Lighting data

Source type	SMD
Color temperature (CCT)	3000 / 4000 / 6500K
Color render index (CRI)	> 80
MacAdam (SDCM)	< 6
Lumen output (lm)	1668 / 1798 /1813

Beam angle	110°
Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 20.000h

Mechanical data

Width (mm)	221
Length (mm)	131
Height (mm)	68
Weight (g)	333
IP rating	IP54
IK rating	IK08


Finishing colour	White RAL9003, White RAL9003
Body material	Polycarbonate
Diffuser material	Polycarbonate
Maximal working temperature	+45° C
Minimal working temperature	+40° C

Electrical data

Nominal power (W)	15
Power factor	> 0,5
Power supply	230V 50/60Hz
Ballast	Included, Included
Insulation class	II

Dimmable	No
Quantity per package	1
Total quantity per boxing	20

Photometry

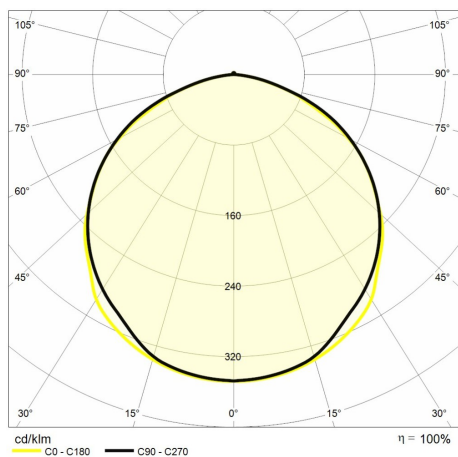

Technical drawing

