

Backlit 1200x300 mm 36 W CRI80 UGR<19

LED Backlit Panel 120x30cm 36W 4000K
CRI80 UGR19

Cod: **6361336**



IP20
Protected from solid bodies larger
than 12 mm




II
Protection class II



CRI >80
Colour rendering index >80



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

120x30 cm 36W backlit LED panel, 4000K neutral white, CRI80, and low glare UGR19, ideal for offices and professional environments

Lighting data

Source type	SMD	Beam angle	90°
Color temperature (CCT)	4000K	Photobiological risk	RG1 (low risk)
Color render index (CRI)	> 80	LED Lifetime	L70 B50 30.000h
MacAdam (SDCM)	< 6		
Lumen output (lm)	3600		


Mechanical data

Width (mm)	1200	Finishing colour	White RAL9003
Length (mm)	300	Body material	Aluminum
Height (mm)	30	Diffuser material	polystyrene
Weight (g)	1400	Maximal working temperature	-40° C
IP rating	IP20	Minimal working temperature	-10° C
IK rating	IK02		

Electrical data

Nominal power (W)	36	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	5
Ballast	Included		
Insulation class	II		

Photometry

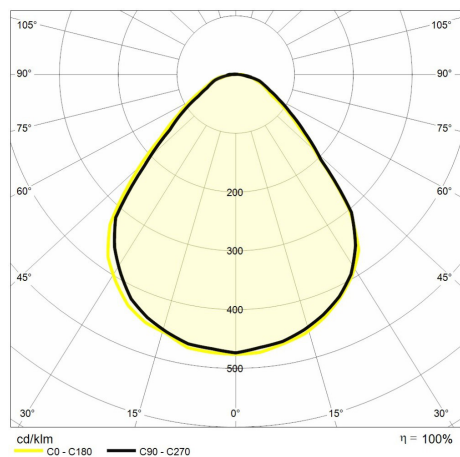

Technical drawing

