



Fido Power

FIDO POWER 50W Portable Floodlight
4000K Shuko Socket

Cod: **6361337**



IP54
Protected against dust and
splashes



I
Protection class I



CRI >80
Colour rendering index >80



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Portable work light with natural light, equipped with a convenient Schuko plug for immediate connection. Extremely handy and robust, it is the ideal tool for temporarily illuminating construction sites, work areas, or emergencies.

Lighting data

Source type	SMD	Beam angle	110°
MacAdam (SDCM)	< 1	Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
Ignition time	0.4	LED Lifetime	L70 B50 20.000h
Color temperature (CCT)	4000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): D, This contains a light source of energy efficiency class (EU2019/2015): D
Color render index (CRI)	> 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	5100		


Mechanical data

Width (mm)	243	Finishing colour	Black RAL9005
Length (mm)	170	Body material	Aluminium, Aluminum
Height (mm)	327	Diffuser material	Tempered glass
Weight (g)	943	Maximal working temperature	+45° C
IP rating	IP 54	temperature	
IK rating	IK 08	Minimal working temperature	-30° C

Electrical data

Nominal power (W)	50	Socket	2x 10/16A + 1x Schuko
Power factor	> 0,9	Power cable type	H07RN-F 3G1.5 mm ²
Power supply	230V 50/60Hz	Power cable length	1,5
Ballast	Integrated	Quantity per package	1
Insulation class	I	Total quantity per boxing	4
Dimmable	No		
Plug	2 poles + ground Schuko		

Photometry

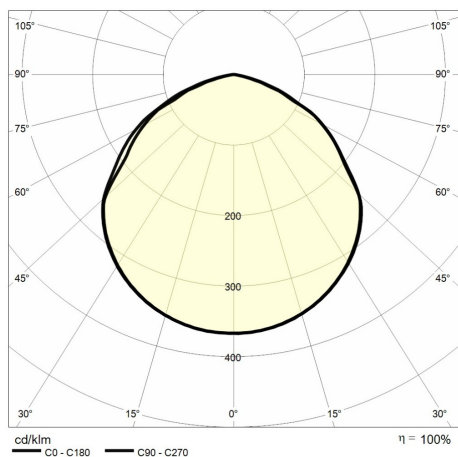

Technical drawing

