



Rubik R CCT

Rubik R CCT 2x6Watt IP54 Corten alette
regorabili

Cod: **6361338**



IP54
Protected against dust and
splashes



I
Protection class I



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Architectural LED wall light with adjustable louvers to shape the light beam. Selectable color temperature to suit your environment. Perfect for facades, entrances, and decorative walls.

Lighting data

| | |
|--------------------------|---------------------|
| Source type | COB |
| Color temperature (CCT) | 3000 / 4000 / 6000K |
| Color render index (CRI) | > 80 |
| MacAdam (SDCM) | < 5 |
| Lumen output (lm) | 970 / 1048 / 980 |
| Beam angle | 120° |

| | |
|-------------------------|--|
| Photobiological risk | Risk Group 1 (Low Risk) |
| LED Lifetime | L70 B50 50.000h |
| Energy efficiency class | This contains a light source of energy efficiency class (EU2019/2015): F |

Mechanical data

| | |
|-------------|-------|
| Width (mm) | 136 |
| Length (mm) | 100 |
| Height (mm) | 116 |
| Weight (g) | 700 |
| IP rating | IP 54 |
| IK rating | IK 03 |


| | |
|-----------------------------|-------------------------|
| Finishing colour | Corten |
| Type of finishing | Polyester powder coated |
| Body material | Aluminium |
| Diffuser material | Tempered glass |
| Maximal working temperature | +45° C |
| Minimal working temperature | -20° C |

Electrical data

| | |
|-------------------|--------------|
| Nominal power (W) | 12 |
| Power factor | > 0,8 |
| Power supply | 230V 50/60Hz |
| Ballast | Integrated |
| Insulation class | I |

| | |
|---------------------------|----|
| Dimmable | No |
| Quantity per package | 1 |
| Total quantity per boxing | 20 |

Photometry

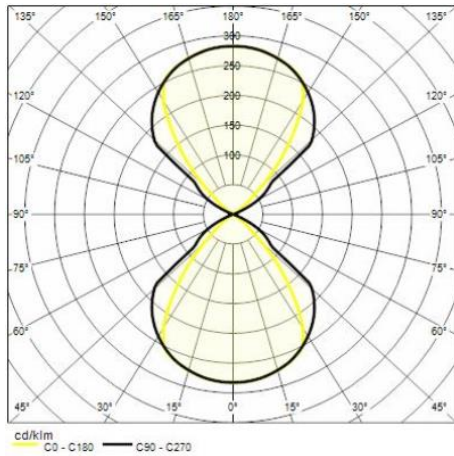

Technical drawing

