



# Rubik 2 CCT

Rubik 2 CCT 4x6Watt IP54 Corten alette  
regorabili

Cod: **6361340**



IP54  
Protected against dust and  
splashes



I  
Protection class I



CRI >80  
Colour rendering index >80



CAM compliant  
CAM (Minimum Environmental  
Criteria) compliant product for  
indoor and outdoor installation



Variable CCT  
Selectable colour temperature



ReeR warranty  
ReeR guarantees the product for a  
time duration of 3 years



## Technical description

Architectural LED wall light with adjustable louvers to shape the light beam. Selectable color temperature to suit your environment. Perfect for facades, entrances, and decorative walls.

### Lighting data

Source type	COB	Photobiological risk	Risk Group 1 (Low Risk)
Color temperature (CCT)	3000 / 4000 / 6000K	LED Lifetime	L70 B50 50.000h
Color render index (CRI)	> 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
MacAdam (SDCM)	< 5		
Lumen output (lm)	1740 / 1883 / 1795		
Beam angle	120°		


### Mechanical data

Width (mm)	200	Finishing colour	Corten
Length (mm)	100	Type of finishing	Polyester powder coated
Height (mm)	100	Body material	Aluminium
Weight (g)	1100	Diffuser material	Tempered glass
IP rating	IP 54	Maximal working temperature	+45° C
IK rating	IK 03	Minimal working temperature	-20° C

### Electrical data

Nominal power (W)	24	Dimmable	No
Power factor	> 0,8	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	10
Ballast	Integrated		
Insulation class	I		

## Photometry

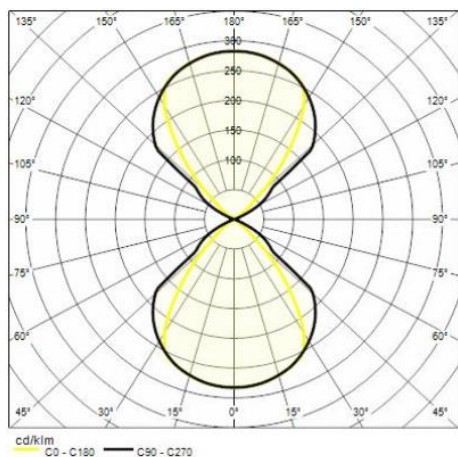

## Technical drawing

