

# Ellisse 2

Ellisse 2 IP54 2X5W Corten 4000k

Cod: **6361348**



IP54  
Protected against dust and  
splashes



I  
Protection class I



CRI >90  
Colour rendering index >90



CAM compliant  
CAM (Minimum Environmental  
Criteria) compliant product for  
indoor and outdoor installation



ReeR warranty  
ReeR guarantees the product for a  
time duration of 3 years



## Technical description

LED wall light with a compact and elegant design, ideal for indoor and outdoor wall installations. The optical lens creates beams of light that enhance entrances, corridors, and facades while maintaining low energy consumption. IP54 protection rating, perfect for residential and professional use.

### Lighting data

Source type	SMD	Photobiological risk	Risk Group 1 (Low Risk)
Color temperature (CCT)	4000K	LED Lifetime	L70 B50 50.000h
Color render index (CRI)	> 90	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): G
MacAdam (SDCM)	< 6		
Lumen output (lm)	1000		
Beam angle	122°		


### Mechanical data

Width (mm)	100	Finishing colour	Corten
Length (mm)	110	Type of finishing	Polyester powder coated
Height (mm)	68	Body material	Aluminium
Weight (g)	700	Diffuser material	Tempered glass
IP rating	IP 54	Maximal working temperature	+45° C
IK rating	IK 06	Minimal working temperature	-20° C

### Electrical data

Nominal power (W)	10	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	20
Ballast	Integrated		
Insulation class	I		

## Photometry

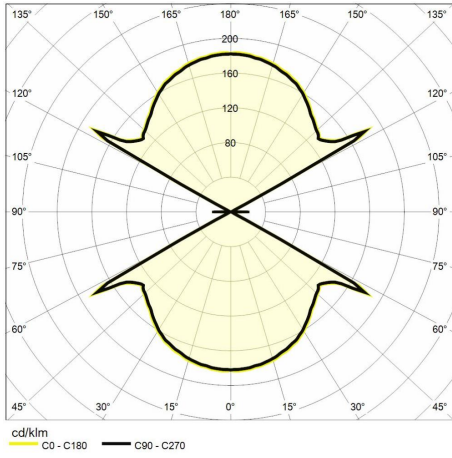

## Technical drawing

