



# Luna

Luna 2x5W IP54 Corten 3000k

Cod: **6361351**



IP54  
Protected against dust and  
splashes



I  
Protection class I



CRI >80  
Colour rendering index >80



CAM compliant  
CAM (Minimum Environmental  
Criteria) compliant product for  
indoor and outdoor installation



ReeR warranty  
ReeR guarantees the product for a  
time duration of 3 years



## Technical description

Compact LED wall light for indoor and outdoor lighting. Uniform light distribution and discreet design. Ideal for entrances, hallways, and residential facades.

### Lighting data

|                          |       |                         |  |
|--------------------------|-------|-------------------------|--|
| Source type              | SMD   | Photobiological risk    | Risk Group 0 (exempt)  |
| Color temperature (CCT)  | 3000K | LED Lifetime            | L70 B50 50.000h  |
| Color render index (CRI) | > 80  | Energy efficiency class | This contains a light source of energy efficiency class (EU2019/2015): G |
| MacAdam (SDCM)           | < 3   |                         |  |
| Lumen output (lm)        | 367   |                         |  |
| Beam angle               | 103°  |                         |  |


### Mechanical data

|             |       |                             |                         |
|-------------|-------|-----------------------------|-------------------------|
| Width (mm)  | 176   | Finishing colour            | Corten                  |
| Length (mm) | 97    | Type of finishing           | Polyester powder coated |
| Height (mm) | 36    | Body material               | Aluminium               |
| Weight (g)  | 450   | Diffuser material           | Polycarbonate           |
| IP rating   | IP 54 | Maximal working temperature | +45° C                  |
| IK rating   | IK 08 | Minimal working temperature | -20° C                  |

### Electrical data

|                   |              |                           |    |
|-------------------|--------------|---------------------------|----|
| Nominal power (W) | 10           | Dimmable                  | No |
| Power factor      | > 0,5        | Quantity per package      | 1  |
| Power supply      | 230V 50/60Hz | Total quantity per boxing | 20 |
| Ballast           | Integrated   |                           |    |
| Insulation class  | I            |                           |    |

## Photometry

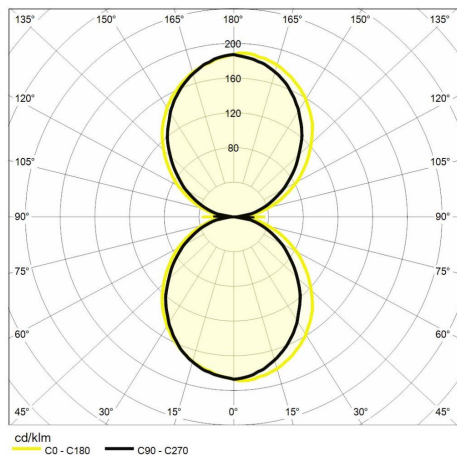

## Technical drawing

