



Luna

Luna 2x5W IP54 Corten 4000k

Cod: **6361352**



IP54
Protected against dust and
splashes



I
Protection class I



CRI >80
Colour rendering index >80



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Compact LED wall light for indoor and outdoor lighting. Uniform light distribution and discreet design. Ideal for entrances, hallways, and residential facades.

Lighting data

Source type	SMD	Photobiological risk	Risk Group 0 (exempt)
Color temperature (CCT)	4000K	LED Lifetime	L70 B50 50.000h
Color render index (CRI)	> 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): G
MacAdam (SDCM)	< 3		
Lumen output (lm)	367		
Beam angle	103°		


Mechanical data

Width (mm)	176	Finishing colour	Corten
Length (mm)	97	Type of finishing	Polyester powder coated
Height (mm)	36	Body material	Aluminium
Weight (g)	450	Diffuser material	Polycarbonate
IP rating	IP 54	Maximal working temperature	+45° C
IK rating	IK 08	Minimal working temperature	-20° C

Electrical data

Nominal power (W)	10	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	20
Ballast	Integrated		
Insulation class	I		

Photometry

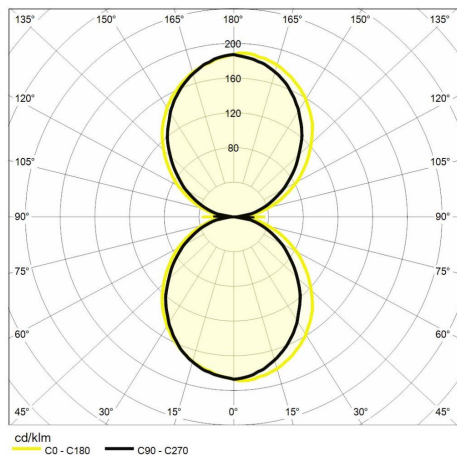

Technical drawing

