


Tratto 4 CCT

Cod: **6361387**

IP54
Protected against dust and
splashes

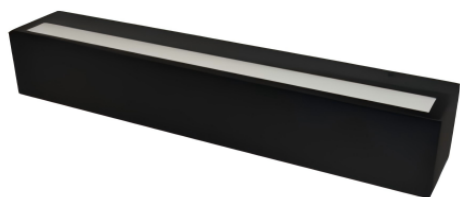

I
Protection class I



CRI >80
Colour rendering index >80



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Lighting data

Source type	SMD	Beam angle	120°
MacAdam (SDCM)	< 1	Photobiological risk	Risk Group 1 (Low Risk)
Ignition time	0.4	LED Lifetime	L70 B50 50.000h
Color temperature (CCT)	3000 / 3500 / 4000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80		
MacAdam (SDCM)	< 5		
Lumen output (lm)	2409 / 2594 / 2460		


Mechanical data

Width (mm)	62	Finishing colour	Black RAL9017
Length (mm)	380	Body material	Aluminum
Height (mm)	66	Diffuser material	Tempered glass
Weight (g)	1400	Maximal working temperature	+40° C
IP rating	IP 54	Minimal working temperature	-15° C
IK rating	IK 06		

Electrical data

Nominal power (W)	24	Dimmable	No
Power factor	> 0,8	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	10
Ballast	Integrated		
Insulation class	I		

Photometry

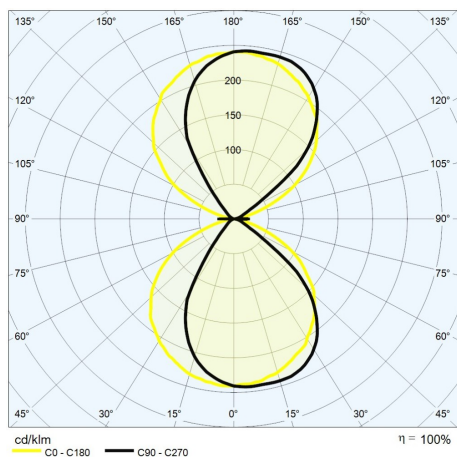

Technical drawing