


Tratto 4 CCT

Cod: **6361388**

IP54
Protected against dust and
splashes

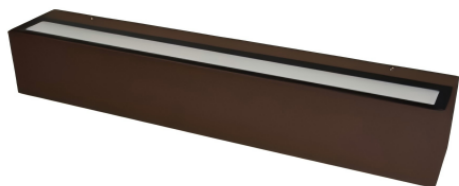

I
Protection class I



CRI >80
Colour rendering index >80



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Lighting data

Source type	SMD
MacAdam (SDCM)	< 1
Ignition time	0.4
Color temperature (CCT)	3000 / 3500 / 4000K
Color render index (CRI)	> 80
MacAdam (SDCM)	< 5
Lumen output (lm)	2409 / 2594 / 2460

Beam angle	120°
Photobiological risk	Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 50.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F

Mechanical data

Width (mm)	62
Length (mm)	380
Height (mm)	66
Weight (g)	1400
IP rating	IP 54
IK rating	IK 06


Finishing colour	Corten RAL8011
Body material	Aluminum
Diffuser material	Tempered glass
Maximal working temperature	+40° C
Minimal working temperature	-15° C

Electrical data

Nominal power (W)	24
Power factor	> 0,8
Power supply	230V 50/60Hz
Ballast	Integrated
Insulation class	I

Dimmable	No
Quantity per package	1
Total quantity per boxing	10

Photometry

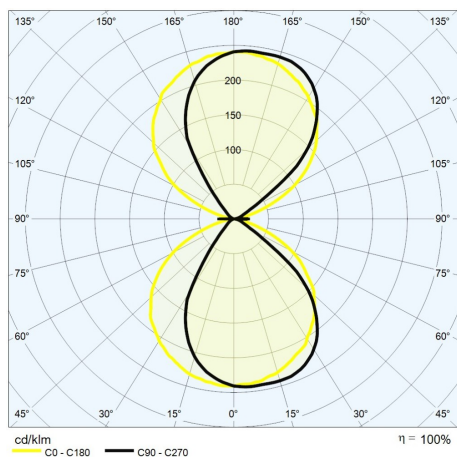

Technical drawing