



Force CCT 100W

Force 3CCT 100W 230V IP65

Cod: **6361392**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



Variable CCT

Selectable colour temperature



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Outdoor floodlight with IP65 protection and variable CCT system for quick selection of the desired light color. It combines a compact, weather-resistant body with optimal lighting performance for facades or traffic areas. Ideal for illuminating large squares and gardens, it offers great reliability and lighting versatility.

Lighting data

Source type	SMD	Beam angle	110°
MacAdam (SDCM)	< 1	Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
Ignition time	0.4	LED Lifetime	L70 B50 20.000h
Color temperature (CCT)	3000 / 4000 / 6500K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	8600 / 9800 / 8400		


Mechanical data

Width (mm)	38	Finishing colour	Black RAL9005, Black RAL9005
Length (mm)	260	Body material	Aluminum, Aluminum
Height (mm)	210	Diffuser material	Tempered glass
Weight (g)	1045	Maximal working temperature	+45° C
IP rating	IP 65	Minimal working temperature	-30° C
IK rating	IK 05		

Electrical data

Nominal power (W)	100	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	10
Ballast	Integrated, Integrated		
Insulation class	I		

Photometry

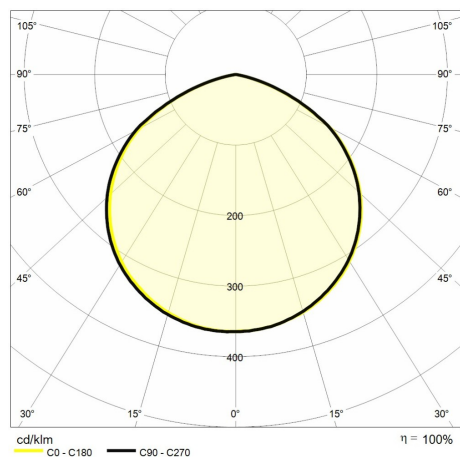

Technical drawing

