



Applique oval CCT 24W

Applique ovale 3CCT 24W IP54 BLACK

Cod: **6361393**



IP54
Protected against dust and
splashes



II
Protection class II



CRI >80
Colour rendering index >80



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

LED wall light with selectable CCT technology, to adapt the color temperature to the environment. Available in standard, multi-power, and sensor versions for greater energy efficiency. Ideal for entryways, hallways, stairways, and protected indoor and outdoor common areas.

Lighting data

Source type	SMD	Beam angle	120°
MacAdam (SDCM)	< 1	Photobiological risk	Risk Group 1 (Low Risk)
Ignition time	0.4	LED Lifetime	L70 B50 20.000h
Color temperature (CCT)	3000 / 4000 / 6500K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): D
Color render index (CRI)	> 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	2500 / 2800 / 2500		


Mechanical data

Width (mm)	137	Finishing colour	Black RAL9005
Length (mm)	49	Body material	PC (polycarbonate)
Height (mm)	266	Diffuser material	Polycarbonate
Weight (g)	350	Maximal working temperature	+40° C
IP rating	IP 54	Minimal working temperature	-20° C
IK rating	IK 06		

Electrical data

Nominal power (W)	24	Dimmable	No
Power factor	> 0,5	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	20
Ballast	Integrated		
Insulation class	II		

Photometry

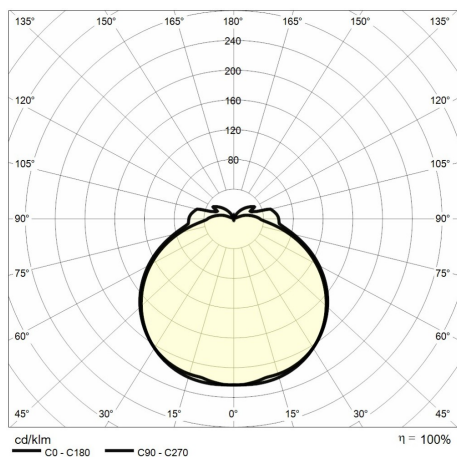

Technical drawing

