



Applique round CCT 20W

Applique tonda 3CCT 24W IP54 BLACK

Cod: **6361394**



IP54
Protected against dust and
splashes



II
Protection class II



CRI >80
Colour rendering index >80



Variable CCT
Selectable colour temperature



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

LED wall light with selectable CCT technology, to adapt the color temperature to the environment. Available in standard, multi-power, and sensor versions for greater energy efficiency. Ideal for entryways, hallways, stairways, and protected indoor and outdoor common areas.

Lighting data

Source type	SMD
MacAdam (SDCM)	< 1
Ignition time	0.4
Color temperature (CCT)	3000 / 4000 / 6500K
Color render index (CRI)	> 80
MacAdam (SDCM)	< 6
Lumen output (lm)	2700 / 2600 / 2400

Beam angle	120°
Photobiological risk	Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 20.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): D

Mechanical data

Diameter (mm)	220
Height (mm)	50
Weight (g)	380
IP rating	IP 54
IK rating	IK 06


Finishing colour	Black RAL9005
Body material	PC (polycarbonate)
Diffuser material	Polycarbonate
Maximal working temperature	+40° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	24
Power factor	> 0,5
Power supply	230V 50/60Hz
Ballast	Integrated
Insulation class	II

Dimmable	No
Quantity per package	1
Total quantity per boxing	20

Photometry

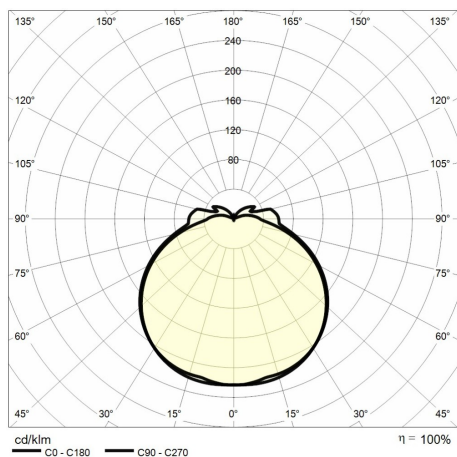

Technical drawing

