



Tablet con sensore CCT 20W

Tablet 20W with sensor

Cod: **6361396**



IP54
Protected against dust and
splashes



I
Protection class I



CRI >80
Colour rendering index >80



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Compact LED floodlight with a built-in motion sensor for automated and intelligent lighting. Its streamlined design and smart functionality make it ideal for optimizing energy consumption in transit areas, entrances, or driveways.

Lighting data

Source type	SMD
MacAdam (SDCM)	< 1
Ignition time	0.4
Color temperature (CCT)	4000K
Color render index (CRI)	> 80
MacAdam (SDCM)	< 6
Lumen output (lm)	2000

Beam angle	110°
Photobiological risk	Risk Group 1 (Low Risk), Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 20.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E

Mechanical data

Width (mm)	122
Length (mm)	146
Height (mm)	29
Weight (g)	200
IP rating	IP 54
IK rating	IK 04


Finishing colour	Black RAL9005, Black RAL9005
Body material	Aluminum, Aluminum
Diffuser material	Tempered glass
Maximal working temperature	+45° C
Minimal working temperature	-30° C

Electrical data

Nominal power (W)	20
Power factor	> 0,5
Power supply	230V 50/60Hz
Ballast	Integrated
Insulation class	I

Dimmable	No
Quantity per package	1
Total quantity per boxing	40

Photometry

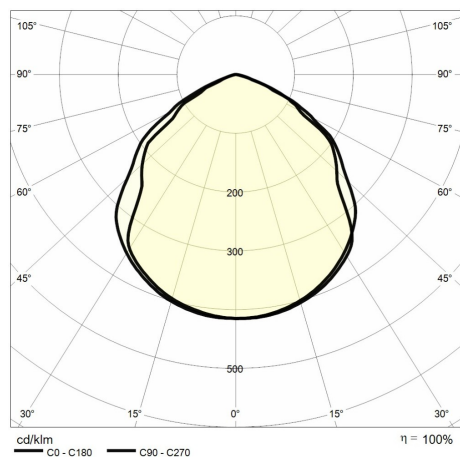

Technical drawing

