




Tek 4000K 6W

Applique TEK 4000K 6W IP54

Cod: **6361398**

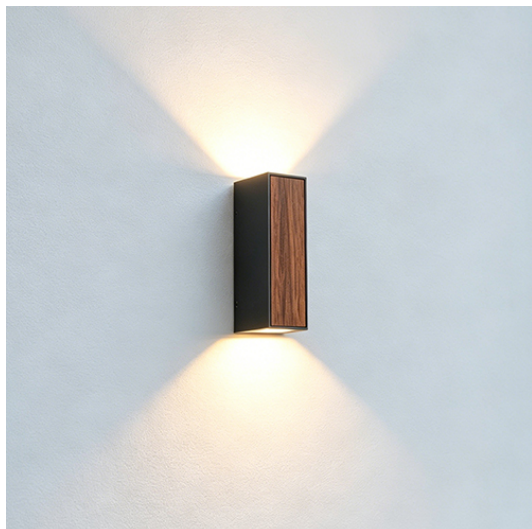

IP54
Protected against dust and
splashes



I
Protection class I



CRI >80
Colour rendering index >80



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

The TEK wall light series combines the structural strength of aluminum with the aesthetic warmth of a wood-effect finish, creating an elegant, natural effect. Thanks to its reliable IP54 rating and the choice of warm (3000K) or neutral (4000K) light, it's the ideal solution for seamlessly integrating into both outdoor settings and refined interior spaces.

Lighting data

Source type	SMD
MacAdam (SDCM)	< 1
Ignition time	0.4
Color temperature (CCT)	4000K
Color render index (CRI)	> 80
MacAdam (SDCM)	< 6
Lumen output (lm)	380

Beam angle	95°
Photobiological risk	Risk Group 1 (Low Risk)
LED Lifetime	L70 B50 50.000h
Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E

Mechanical data

Width (mm)	75
Length (mm)	45
Height (mm)	165
Weight (g)	600
IP rating	IP 54
IK rating	IK 05


Finishing colour	Black RAL9005
Body material	Aluminum
Diffuser material	Tempered glass
Maximal working temperature	+45° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	6
Power factor	> 0,8
Power supply	230V 50/60Hz
Ballast	Integrated
Insulation class	I

Dimmable	No
Quantity per package	1
Total quantity per boxing	12

Photometry

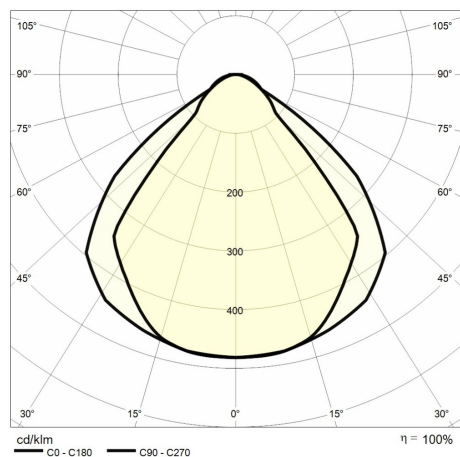

Technical drawing

