



Spin bollard 300mm

SPIN BOLLARD 12W 4000K BLACK IP65
h300mm

Cod: **6361439**



IP65
Dustproof and protected against
water jets



I
Protection class I



CRI >90
Colour rendering index >90



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

The SPIN outdoor lighting line offers an elegant, modern, and highly versatile solution for enhancing gardens, driveways, and facades. Available in both bollard and wall-mounted versions, this series is designed to withstand the elements effectively: its IP65 rating ensures complete protection against dust and excellent resistance to water jets, making the products ideal for outdoor use. All fixtures in the range feature a 12W LED light source?delivering excellent performance with low energy consumption?and come in various configurations to suit any design requirement. The wall-mounted lights are ideal for perimeter lighting, while the bollards are available in two heights (300 mm and 600 mm) to provide targeted illumination for paths, flowerbeds, and walkways. Finishes: Three understated, contemporary colors designed to blend seamlessly into any architectural setting: White, Black, and Corten. Color Temperatures: A choice between warm light (3000K)?ideal for creating a soft, welcoming atmosphere?and natural light (4000K), perfect for greater clarity and visual definition. This is a comprehensive, modular product family designed to illuminate residential or commercial outdoor spaces with aesthetic consistency and high technical reliability.

Lighting data

Source type	SMD	Beam angle	120°
MacAdam (SDCM)	< 1	Photobiological risk	Risk Group 1 (Low Risk)
Ignition time	0.4	LED Lifetime	L70 B50 50.000h
Color temperature (CCT)	4000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): D
Color render index (CRI)	> 90		
MacAdam (SDCM)	< 6		
Lumen output (lm)	696		


Mechanical data

Width (mm)	63	Finishing colour	Black RAL9005
Length (mm)	176	Body material	Aluminum
Height (mm)	300	Diffuser material	Polycarbonate
Weight (g)	950	Maximal working temperature	+45° C
IP rating	IP 65	Minimal working temperature	-20° C
IK rating	IK 06		

Electrical data

Nominal power (W)	12	Dimmable	No
Power factor	> 0,8	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	12
Ballast	Integrated		
Insulation class	I		

Photometry

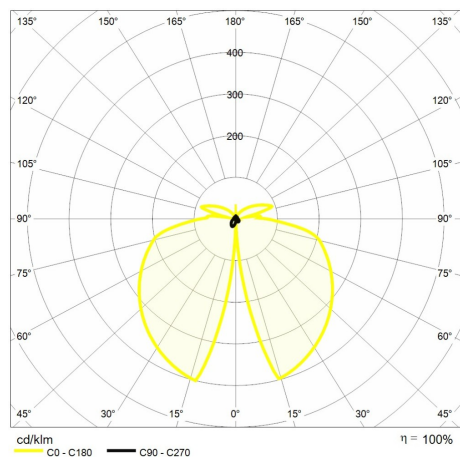

Technical drawing

