



Spin bollard 600mm

SPIN BOLLARD 12W 3000K CORTEN
IP65 h600mm

Cod: **6361443**



IP65
Dustproof and protected against
water jets



I
Protection class I



CRI >90
Colour rendering index >90



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

The SPIN outdoor lighting line offers an elegant, modern, and highly versatile solution for enhancing gardens, driveways, and facades. Available in both bollard and wall-mounted versions, this series is designed to withstand the elements effectively: its IP65 rating ensures complete protection against dust and excellent resistance to water jets, making the products ideal for outdoor use. All fixtures in the range feature a 12W LED light source delivering excellent performance with low energy consumption and come in various configurations to suit any design requirement. The wall-mounted lights are ideal for perimeter lighting, while the bollards are available in two heights (300 mm and 600 mm) to provide targeted illumination for paths, flowerbeds, and walkways. Finishes: Three understated, contemporary colors designed to blend seamlessly into any architectural setting: White, Black, and Corten. Color Temperatures: A choice between warm light (3000K) ideal for creating a soft, welcoming atmosphere and natural light (4000K), perfect for greater clarity and visual definition. This is a comprehensive, modular product family designed to illuminate residential or commercial outdoor spaces with aesthetic consistency and high technical reliability.

Lighting data

Source type	SMD	Beam angle	120°
MacAdam (SDCM)	< 1	Photobiological risk	Risk Group 1 (Low Risk)
Ignition time	0.4	LED Lifetime	L70 B50 50.000h
Color temperature (CCT)	3000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): D
Color render index (CRI)	> 90		
MacAdam (SDCM)	< 6		
Lumen output (lm)	696		


Mechanical data

Width (mm)	63	Finishing colour	Corten
Length (mm)	176	Body material	Aluminum
Height (mm)	600	Diffuser material	Polycarbonate
Weight (g)	1360	Maximal working temperature	+45° C
IP rating	IP 65	Minimal working temperature	-20° C
IK rating	IK 06		

Electrical data

Nominal power (W)	12	Dimmable	No
Power factor	> 0,8	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	8
Ballast	Integrated		
Insulation class	I		

Photometry

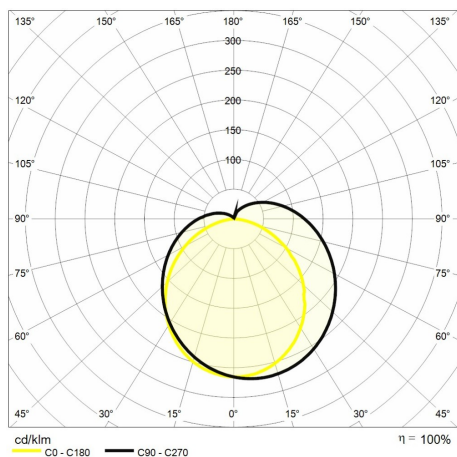

Technical drawing

