



High bay

Multipower High Bay Light
120/160/200W 4000K

Cod: **6361450**



IP65

Dustproof and protected against water jets



I

Protection class I



Multi-Power

Product with different power levels settable via switch



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

High-performance industrial floodlight with neutral light (4000K), designed for warehouses, production areas, and high-ceiling installations. The integrated Multipower driver allows the fixture's power output to be adjusted in three steps (120W, 160W, or 200W) directly on-site, optimizing energy consumption based on actual lighting requirements. A versatile and durable ceiling light (IP54-rated for protection against dust and water splashes), suitable for damp environments, stairwells, or covered outdoor areas. It offers dual configuration options: a 3CCT selector for color temperature and a Multipower driver to adjust power consumption settings.

Lighting data

Source type	SMD	Beam angle	60° / 90° / 120°
MacAdam (SDCM)	< 1	Photobiological risk	Risk Group 1 (Low Risk)
Color temperature (CCT)	4000K	LED Lifetime	L70 B50 50.000h
Color render index (CRI)	> 70	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): B
MacAdam (SDCM)	< 6		
Lumen output (lm)	120W = 19200, 160W = 25600, 200W = 32000		


Mechanical data

Diameter (mm)	325	Finishing colour	Black RAL9005
Height (mm)	122	Body material	Aluminum
Weight (g)	2120	Diffuser material	Polycarbonate
IP rating	IP 65	Maximal working temperature	+40° C
IK rating	IK 08	Minimal working temperature	-20° C

Electrical data

Nominal power (W)	200 / 160 / 120	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	230V 50/60Hz	Total quantity per boxing	1
Ballast	Integrated		
Insulation class	I		

Photometry

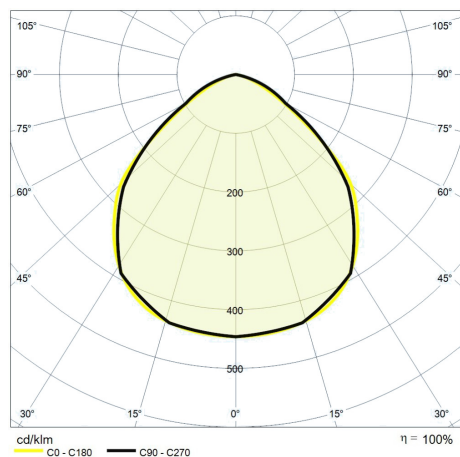

Technical drawing

